


RCBO DS203NC. The effective choice

The benefits of a product with the highest quality standards



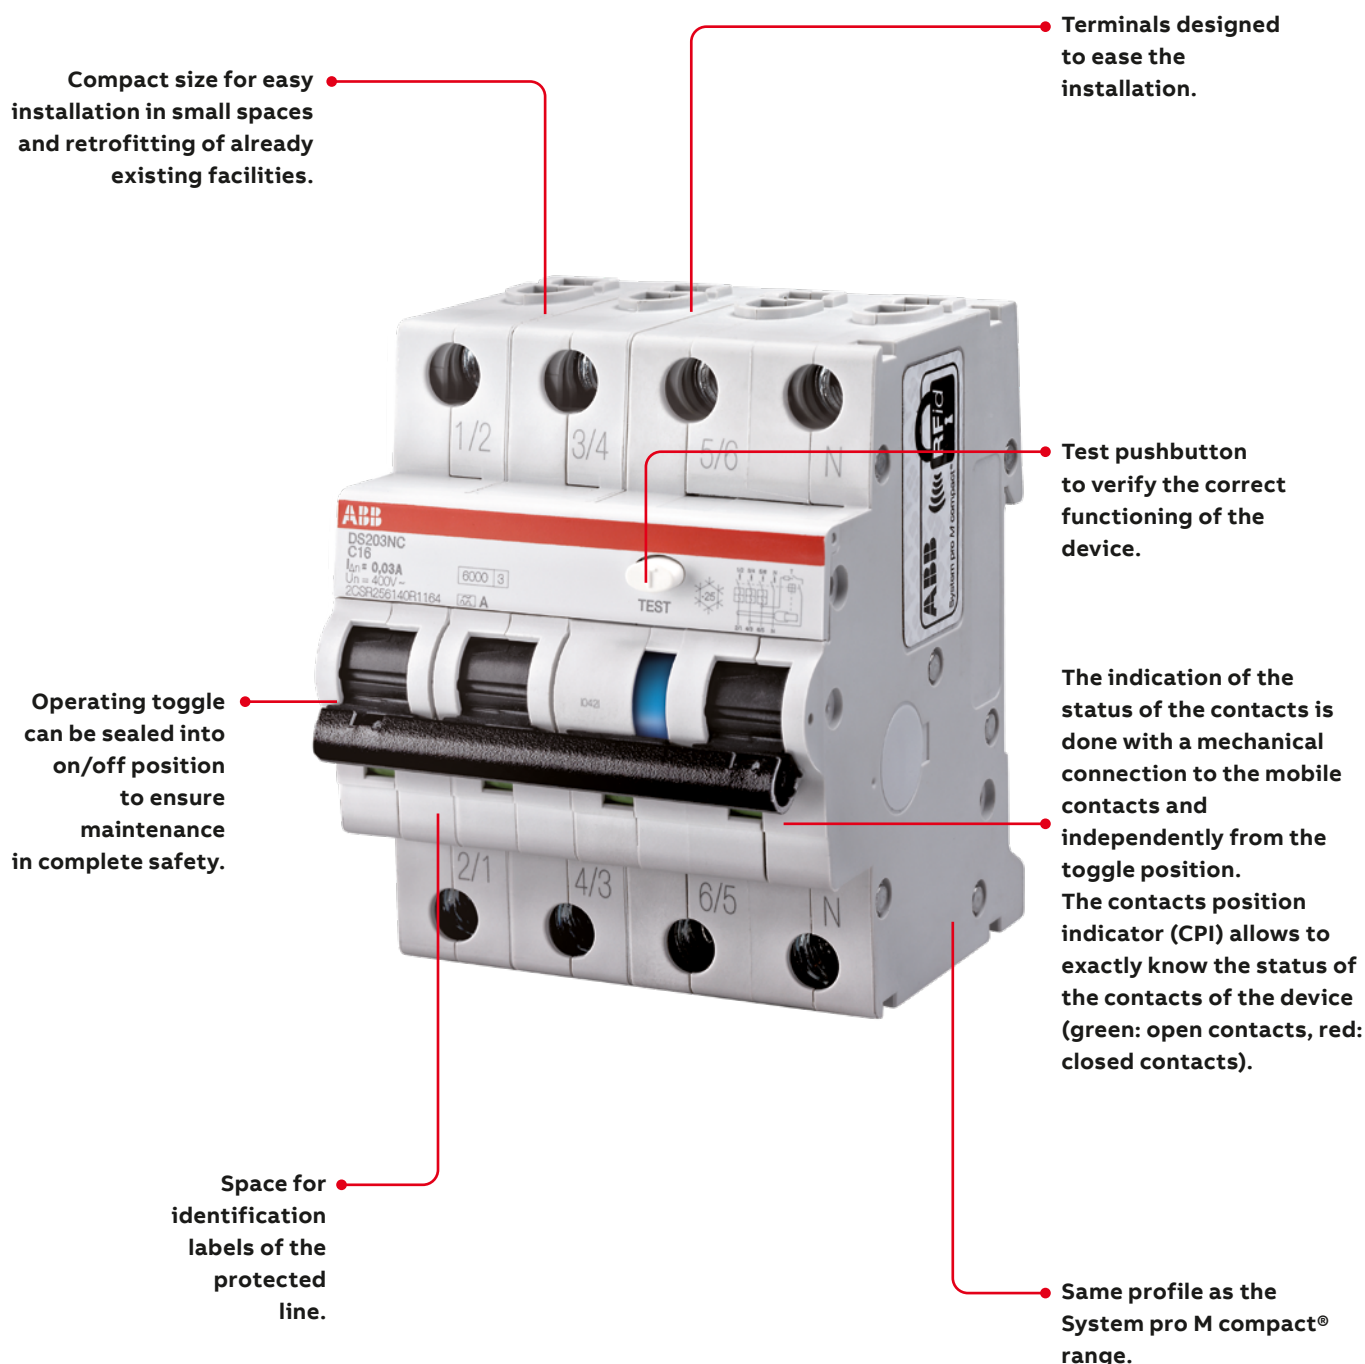

Use with cables and with busbars

Terminals with two slots allow to use different types of conductors: one housing is designed for cables up to 25 mm², the other for busbars or cables up to 10 mm².



Differential trip indicator

In case of tripping due to earth fault, a blue flag appears on the toggle thus immediately showing the cause of trip of the device. This feature helps in troubleshooting on the network and reduces the downtime for maintenance.



Laser print information

All the necessary technical and installation information are laser printed on the front and side of units ensuring visibility along the time, including order code on front of device for future orders.



Mounting clip

The mounting clip eases the installation and removal from the DIN rail, even when used in a battery of devices with busbars on bottom terminals (without need of remove other devices).



Approval stamps

DS203NC residual current circuit breakers with overcurrent protection can meet the different installation habits in the various countries and are approved by the most important certification bodies like IMQ, VDE, EAC, KEMA.

RCBOs

DS203NC technical features

			DS203NC L	DS203NC
Standards			IEC/EN 61009-1; IEC/EN 61009-2-1	IEC/EN 61009-1; IEC/EN 61009-2-1
Electrical features				
Type (wave form of the earth leakage sensed)			AC, A, APR	AC, A, APR, S
Number of poles			3P+N	3P+N
Rated current I_n	A		$6 \leq I_n \leq 32A$	$6 \leq I_n \leq 32A$
Rated sensitivity $I_{\Delta n}$	mA		30-300	30-100-300
Rated operational voltage U_e	V		400-415V	400-415V
Rated Insulation voltage U_i acc. to IEC/EN 60664-1	V		500 V AC	500 V AC
Overvoltage category			III	III
Pollution degree			2	2
Operating voltage of circuit test U_t	V		195 (300 for 30 mA) - 440	
Rated frequency f	Hz		50/60	50/60
Rated short circuit breaking capacity acc. to IEC/EN 61009-1	ultimate I_{cn}	A	4500	6000
Rated short circuit breaking capacity acc. to IEC/EN 60947-2 (only referring to internal short circuit test)	ultimate I_{cu}	kA	6	10
	service I_{cs}	kA	4.5	5
Grid distance	mm		35	35
Rated residual breaking capacity $I_{\Delta m}$ acc. To EN 61009	kA		4.5	6
Rated residual breaking capacity $I_{\Delta m}$ acc. to IEC 61009	kA		4.5	4.5
Rated impulse withstand voltage U_{imp} . (1.2/50 μ s)	kV		4	4
Dielectric test voltage at ind. freq. for 1 min.	kV		2.5	2.5
Tripping characteristic	B: $3 I_n \leq I_m \leq 5 I_n$			■
	C: $5 I_n \leq I_m \leq 10 I_n$		■	■
	K: $10 I_n \leq I_m \leq 14 I_n$			■
Surge current resistance (wave 8/20)	A		NA for A, AC versions; 3000 for APR version	NA for A, AC versions; 3000 for APR version; 5000 for S version
Mechanical features				
Housing Type			Insulation group II, RAL 7035	Insulation group II, RAL 7035
Toggle Type			black, sealable in ON-OFF positions	black, sealable in ON-OFF positions
Contact position indication			CPI on window	CPI on window
Electrical Endurance	cycles (OFF-ON-OFF)		10000	10000
Mechanical Endurance	cycles (OFF-ON-OFF)		20000	20000
Protection degree	housing		IP40	IP40
	terminals		IP20	IP20
Resistance to Shock acc. to IEC 60068-2-27			30g - 2 shocks - 13ms	30g - 2 shocks - 13ms
Vibration resistance acc. to IEC/EN 60068-2-6			0,35mm or 5g - 20 cycles at 5...150...5 Hz without load	0,35mm or 5g - 20 cycles at 5...150...5 Hz without load
Environmental conditions (damp heat) acc. to IEC/EN 60068-2-30	°C/RH		28 cycles with 55°C/90-96% and 25°C/95-100%	28 cycles with 55°C/90-96% and 25°C/95-100%
Reference temperature for tripping characteristics	°C		30	30
Ambient temperature (with daily average $\leq +35$ °C)	°C		-25...+55	-25...+55
Storage temperature	°C		-40...+70	-40...+70

RCBOs

DS203NC technical features

DS203NC L			DS203NC
Installation			
Terminal type	top/ bottom		failsafe bi-directional cylinder-lift terminal (shock protected)
Cross-section of conductors (IEC)	top/ bottom	mm ²	25/25
Cross-section of busbars (IEC)	top/ bottom	mm ²	10/10
Tightening torque	top/ bottom	Nm	2.8
Wire Stripping Length		mm	12
Screwdriver			No. 2 Pozidrive
Mounting Type			on DIN rail EN 60715 (35 mm) by means of mounting clip
Supply from			Top/bottom terminals
Dimensions and weight			
Dimensions (H x D x W)		mm	85 x 69 x 70.4
Weight		g	480
Combination with auxiliary elements			
Combinable with accessories and auxiliaries, by means of interface contact SN201-IH	Auxiliary contact		yes
	Signal contact		yes
	Shunt trip		yes
	Undervoltage release		yes
	Overvoltage release		yes

RCBOs

DS203NC L AC 



DS203NC L - AC

DS203NC L - AC type - C curve

Function: protection of end user three-phase circuits against overload and short-circuit currents; protection against the effects of sinusoidal alternating earth fault currents; protection against indirect contact and additional protection against direct contact ($I_{\Delta n} = 30 \text{ mA}$).

Application: commercial, industrial.

Standard: IEC/EN 61009-1; IEC/EN 61009-2-1

$I_{cn} = 4\,500 \text{ A}$

Number of poles	Rated residual current $I_{\Delta n} \text{ mA}$	Rated current $I_n \text{ A}$	Bbn 8012542 EAN	Order details		Price 1 piece	Weight 1 piece	Pack unit
				Type code	Order code		kg	pc.
3P+N	30	6	353928	DS203NC L C6 AC30	2CSR246040R1064		0.480	1
		8	343622	DS203NC L C8 AC30	2CSR246040R1084		0.480	1
		10	353829	DS203NC L C10 AC30	2CSR246040R1104		0.480	1
		13	343523	DS203NC L C13 AC30	2CSR246040R1134		0.480	1
		16	353720	DS203NC L C16 AC30	2CSR246040R1164		0.480	1
		20	343424	DS203NC L C20 AC30	2CSR246040R1204		0.480	1
		25	353621	DS203NC L C25 AC30	2CSR246040R1254		0.480	1
		32	343325	DS203NC L C32 AC30	2CSR246040R1324		0.480	1
	300	6	343226	DS203NC L C6 AC300	2CSR246040R3064		0.480	1
		8	343127	DS203NC L C8 AC300	2CSR246040R3084		0.480	1
		10	343028	DS203NC L C10 AC300	2CSR246040R3104		0.480	1
		13	342922	DS203NC L C13 AC300	2CSR246040R3134		0.480	1
		16	776727	DS203NC L C16 AC300	2CSR246040R3164		0.480	1
		20	342823	DS203NC L C20 AC300	2CSR246040R3204		0.480	1
		25	342724	DS203NC L C25 AC300	2CSR246040R3254		0.480	1
		32	358428	DS203NC L C32 AC300	2CSR246040R3324		0.480	1

RCBOs

DS203NC L A  type



DS203NC L - A

DS203NC L - A type - C curve

Function: protection of end user three-phase circuits against overload and short-circuit currents; protection against the effects of sinusoidal alternating and direct pulsating earth fault currents; protection against indirect contact and additional protection against direct contact ($I_{\Delta n} = 30 \text{ mA}$).

Application: commercial, industrial.

Standard: IEC/EN 61009-1; IEC/EN 61009-2-1

$I_{cn} = 4\ 500 \text{ A}$

Number of poles	Rated residual current $I_{\Delta n} \text{ mA}$	Rated current $I_n \text{ A}$	Bbn 8012542 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
				Type code	Order code			
3P+N	30	6	354628	DS203NC L C6 A30	2CSR246140R1064		0.480	1
		8	344322	DS203NC L C8 A30	2CSR246140R1084		0.480	1
		10	354529	DS203NC L C10 A30	2CSR246140R1104		0.480	1
		13	344223	DS203NC L C13 A30	2CSR246140R1134		0.480	1
		16	354420	DS203NC L C16 A30	2CSR246140R1164		0.480	1
		20	344124	DS203NC L C20 A30	2CSR246140R1204		0.480	1
		25	354321	DS203NC L C25 A30	2CSR246140R1254		0.480	1
		32	498025	DS203NC L C32 A30	2CSR246140R1324		0.480	1
	300	6	499220	DS203NC L C6 A300	2CSR246140R3064		0.480	1
		8	344025	DS203NC L C8 A300	2CSR246140R3084		0.480	1
		10	354222	DS203NC L C10 A300	2CSR246140R3104		0.480	1
		13	343929	DS203NC L C13 A300	2CSR246140R3134		0.480	1
		16	354123	DS203NC L C16 A300	2CSR246140R3164		0.480	1
		20	343820	DS203NC L C20 A300	2CSR246140R3204		0.480	1
		25	354024	DS203NC L C25 A300	2CSR246140R3254		0.480	1
		32	343721	DS203NC L C32 A300	2CSR246140R3324		0.480	1

RCBOs

DS203NC L APR type



DS203NC L - APR

DS203NC L - APR type - C curve

Function: protection of end user three-phase circuits against overload and short-circuit currents; protection against the effects of sinusoidal alternating and direct pulsating earth fault currents, providing an optimal compromise between safety and continuity of service, thanks to the resistance to unwanted tripping; protection against indirect contact and additional protection against direct contact ($I_{\Delta n} = 30\text{ mA}$); protection and isolation of resistive and inductive loads.

Application: commercial, industrial.

Standard: IEC/EN 61009-1; IEC/EN 61009-2-1

$I_{cn} = 4\,500\text{ A}$

Number of poles	Rated residual current $I_{\Delta n}\text{ mA}$	Rated current $I_n\text{ A}$	Bbn 8012542 EAN	Order details		Price 1 piece	Weight 1 piece	Pack unit
				Type code	Order code		kg	pc.
3P+N	30	6	079125	DS203NC L C6 APR30	2CSR246440R1064		0.480	1
		8	079026	DS203NC L C8 APR30	2CSR246440R1084		0.480	1
		10	078920	DS203NC L C10 APR30	2CSR246440R1104		0.480	1
		13	078821	DS203NC L C13 APR30	2CSR246440R1134		0.480	1
		16	078722	DS203NC L C16 APR30	2CSR246440R1164		0.480	1
		20	078623	DS203NC L C20 APR30	2CSR246440R1204		0.480	1
		25	078524	DS203NC L C25 APR30	2CSR246440R1254		0.480	1
		32	078425	DS203NC L C32 APR30	2CSR246440R1324		0.480	1

RCBOs

DS203NC AC  type



DS203NC - AC

DS203NC - AC type - B curve

Function: protection of end user three-phase circuits against overload and short-circuit currents; protection against the effects of sinusoidal alternating earth fault currents; protection against indirect contact and additional protection against direct contact ($I_{\Delta n} = 30 \text{ mA}$).

Application: commercial, industrial.

Standard: IEC/EN 61009-1; IEC/EN 61009-2-1

$I_{cn} = 6\,000 \text{ A}$

Number of poles	Rated residual current $I_{\Delta n} \text{ mA}$	Rated current $I_n \text{ A}$	Bbn 8012542 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
				Type code	Order code			
3P+N	30	6	077428	DS203NC B6 AC30	2CSR256040R1065		0.480	1
		8	077329	DS203NC B8 AC30	2CSR256040R1085		0.480	1
		10	077220	DS203NC B10 AC30	2CSR256040R1105		0.480	1
		13	077121	DS203NC B13 AC30	2CSR256040R1135		0.480	1
		16	077022	DS203NC B16 AC30	2CSR256040R1165		0.480	1
		20	076926	DS203NC B20 AC30	2CSR256040R1205		0.480	1
		25	790525	DS203NC B25 AC30	2CSR256040R1255		0.480	1
		32	076827	DS203NC B32 AC30	2CSR256040R1325		0.480	1
	100	6	076728	DS203NC B6 AC100	2CSR256040R2065		0.480	1
		8	076629	DS203NC B8 AC100	2CSR256040R2085		0.480	1
		10	076520	DS203NC B10 AC100	2CSR256040R2105		0.480	1
		13	076421	DS203NC B13 AC100	2CSR256040R2135		0.480	1
		16	076322	DS203NC B16 AC100	2CSR256040R2165		0.480	1
		20	076223	DS203NC B20 AC100	2CSR256040R2205		0.480	1
		25	076124	DS203NC B25 AC100	2CSR256040R2255		0.480	1
		32	076025	DS203NC B32 AC100	2CSR256040R2325		0.480	1
	300	6	353423	DS203NC B6 AC300	2CSR256040R3065		0.480	1
		8	353324	DS203NC B8 AC300	2CSR256040R3085		0.480	1
		10	266327	DS203NC B10 AC300	2CSR256040R3105		0.480	1
		13	266228	DS203NC B13 AC300	2CSR256040R3135		0.480	1
		16	266129	DS203NC B16 AC300	2CSR256040R3165		0.480	1
		20	266020	DS203NC B20 AC300	2CSR256040R3205		0.480	1
		25	265924	DS203NC B25 AC300	2CSR256040R3255		0.480	1
		32	790822	DS203NC B32 AC300	2CSR256040R3325		0.480	1

RCBOs

DS203NC AC  type



DS203NC - AC

DS203NC - AC type - C curve

Function: protection of end user three-phase circuits against overload and short-circuit currents; protection against the effects of sinusoidal alternating earth fault currents; protection against indirect contact and additional protection against direct contact ($I_{\Delta n} = 30 \text{ mA}$).

Application: commercial, industrial.

Standard: IEC/EN 61009-1; IEC/EN 61009-2-1

$I_{cn} = 6\,000 \text{ A}$

Number of poles	Rated residual current $I_{\Delta n} \text{ mA}$	Rated current $I_n \text{ A}$	Bbn 8012542 EAN	Order details		Price 1 piece	Weight 1 piece	Pack unit
				Type code	Order code		kg	pc.
3P+N	30	6	265825	DS203NC C6 AC30	2CSR256040R1064		0.480	1
		8	353225	DS203NC C8 AC30	2CSR256040R1084		0.480	1
		10	518228	DS203NC C10 AC30	2CSR256040R1104		0.480	1
		13	186823	DS203NC C13 AC30	2CSR256040R1134		0.480	1
		16	352228	DS203NC C16 AC30	2CSR256040R1164		0.480	1
		20	186724	DS203NC C20 AC30	2CSR256040R1204		0.480	1
		25	352129	DS203NC C25 AC30	2CSR256040R1254		0.480	1
		32	263920	DS203NC C32 AC30	2CSR256040R1324		0.480	1
	100	6	263821	DS203NC C6 AC100	2CSR256040R2064		0.480	1
		8	263722	DS203NC C8 AC100	2CSR256040R2084		0.480	1
		10	263623	DS203NC C10 AC100	2CSR256040R2104		0.480	1
		13	263524	DS203NC C13 AC100	2CSR256040R2134		0.480	1
		16	518327	DS203NC C16 AC100	2CSR256040R2164		0.480	1
		20	263425	DS203NC C20 AC100	2CSR256040R2204		0.480	1
		25	186021	DS203NC C25 AC100	2CSR256040R2254		0.480	1
		32	352020	DS203NC C32 AC100	2CSR256040R2324		0.480	1
	300	6	185925	DS203NC C6 AC300	2CSR256040R3064		0.480	1
		8	185826	DS203NC C8 AC300	2CSR256040R3084		0.480	1
		10	185727	DS203NC C10 AC300	2CSR256040R3104		0.480	1
		13	185628	DS203NC C13 AC300	2CSR256040R3134		0.480	1
		16	185529	DS203NC C16 AC300	2CSR256040R3164		0.480	1
		20	185420	DS203NC C20 AC300	2CSR256040R3204		0.480	1
		25	517825	DS203NC C25 AC300	2CSR256040R3254		0.480	1
		32	180821	DS203NC C32 AC300	2CSR256040R3324		0.480	1

RCBOs

DS203NC A  type



DS203NC - A

DS203NC - A type - B curve

Function: protection of end user three-phase circuits against overload and short-circuit currents; protection against the effects of sinusoidal alternating and direct pulsating earth fault currents; protection against indirect contact and additional protection against direct contact ($I_{\Delta n} = 30 \text{ mA}$).

Application: commercial, industrial.

Standard: IEC/EN 61009-1; IEC/EN 61009-2-1

$I_{cn} = 6\,000 \text{ A}$

Number of poles	Rated residual current $I_{\Delta n} \text{ mA}$	Rated current $I_n \text{ A}$	Bbn 8012542 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
				Type code	Order code			
3P+N	30	6	078326	DS203NC B6 A30	2CSR256140R1065		0.480	1
		8	078227	DS203NC B8 A30	2CSR256140R1085		0.480	1
		10	078128	DS203NC B10 A30	2CSR256140R1105		0.480	1
		13	078029	DS203NC B13 A30	2CSR256140R1135		0.480	1
		16	077923	DS203NC B16 A30	2CSR256140R1165		0.480	1
		20	077824	DS203NC B20 A30	2CSR256140R1205		0.480	1
		25	077725	DS203NC B25 A30	2CSR256140R1255		0.480	1
		32	077626	DS203NC B32 A30	2CSR256140R1325		0.480	1
	100	6	080329	DS203NC B6 A100	2CSR256140R2065		0.480	1
		8	080220	DS203NC B8 A100	2CSR256140R2085		0.480	1
		10	080121	DS203NC B10 A100	2CSR256140R2105		0.480	1
		13	080022	DS203NC B13 A100	2CSR256140R2135		0.480	1
		16	079927	DS203NC B16 A100	2CSR256140R2165		0.480	1
		20	079828	DS203NC B20 A100	2CSR256140R2205		0.480	1
		25	079729	DS203NC B25 A100	2CSR256140R2255		0.480	1
		32	079620	DS203NC B32 A100	2CSR256140R2325		0.480	1
	300	6	079521	DS203NC B6 A300	2CSR256140R3065		0.480	1
		8	079422	DS203NC B8 A300	2CSR256140R3085		0.480	1
		10	079323	DS203NC B10 A300	2CSR256140R3105		0.480	1
		13	079224	DS203NC B13 A300	2CSR256140R3135		0.480	1
		16	305026	DS203NC B16 A300	2CSR256140R3165		0.480	1
		20	305125	DS203NC B20 A300	2CSR256140R3205		0.480	1
		25	400226	DS203NC B25 A300	2CSR256140R3255		0.480	1
		32	400028	DS203NC B32 A300	2CSR256140R3325		0.480	1

RCBOs

DS203NC A  type



DS203NC - A

DS203NC - A type - C curve

Function: protection of end user three-phase circuits against overload and short-circuit currents; protection against the effects of sinusoidal alternating and direct pulsating earth fault currents; protection against indirect contact and additional protection against direct contact ($I_{\Delta n} = 30 \text{ mA}$).

Application: commercial, industrial.

Standard: IEC/EN 61009-1; IEC/EN 61009-2-1

$I_{cn} = 6\,000 \text{ A}$

Number of poles	Rated residual current $I_{\Delta n} \text{ mA}$	Rated current $I_n \text{ A}$	Bbn 8012542 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
				Type code	Order code			
3P+N	30	6	400127	DS203NC C6 A30	2CSR256140R1064		0.480	1
		8	058823	DS203NC C8 A30	2CSR256140R1084		0.480	1
		10	896524	DS203NC C10 A30	2CSR256140R1104		0.480	1
		13	768227	DS203NC C13 A30	2CSR256140R1134		0.480	1
		16	830924	DS203NC C16 A30	2CSR256140R1164		0.480	1
		20	839927	DS203NC C20 A30	2CSR256140R1204		0.480	1
		25	768524	DS203NC C25 A30	2CSR256140R1254		0.480	1
		32	831228	DS203NC C32 A30	2CSR256140R1324		0.480	1
	100	6	840220	DS203NC C6 A100	2CSR256140R2064		0.480	1
		8	896425	DS203NC C8 A100	2CSR256140R2084		0.480	1
		10	768128	DS203NC C10 A100	2CSR256140R2104		0.480	1
		13	830825	DS203NC C13 A100	2CSR256140R2134		0.480	1
		16	839828	DS203NC C16 A100	2CSR256140R2164		0.480	1
		20	896722	DS203NC C20 A100	2CSR256140R2204		0.480	1
		25	768425	DS203NC C25 A100	2CSR256140R2254		0.480	1
		32	831129	DS203NC C32 A100	2CSR256140R2324		0.480	1
	300	6	840121	DS203NC C6 A300	2CSR256140R3064		0.480	1
		8	830726	DS203NC C8 A300	2CSR256140R3084		0.480	1
		10	839729	DS203NC C10 A300	2CSR256140R3104		0.480	1
		13	896623	DS203NC C13 A300	2CSR256140R3134		0.480	1
		16	768326	DS203NC C16 A300	2CSR256140R3164		0.480	1
		20	831020	DS203NC C20 A300	2CSR256140R3204		0.480	1
		25	840022	DS203NC C25 A300	2CSR256140R3254		0.480	1
		32	631620	DS203NC C32 A300	2CSR256140R3324		0.480	1

RCBOs

DS203NC A  type



DS203NC - A

DS203NC - A type - K curve

Function: protection of end user three-phase circuits against overload and short-circuit currents; protection against the effects of sinusoidal alternating and direct pulsating earth fault currents; protection against indirect contact and additional protection against direct contact ($I_{\Delta n} = 30 \text{ mA}$).

Application: commercial, industrial.

Standard: IEC/EN 61009-1; IEC/EN 61009-2-1

$I_{cn} = 6\,000 \text{ A}$

Number of poles	Rated residual current $I_{\Delta n} \text{ mA}$	Rated current $I_n \text{ A}$	Bbn 8012542 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
				Type code	Order code			
3P+N	30	6	376026	DS203NC K6 A30	2CSR256140R1067		0.480	1
		8	629726	DS203NC K8 A30	2CSR256140R1087		0.480	1
		10	375920	DS203NC K10 A30	2CSR256140R1107		0.480	1
		13	779322	DS203NC K13 A30	2CSR256140R1137		0.480	1
		16	769323	DS203NC K16 A30	2CSR256140R1167		0.480	1
		20	631521	DS203NC K20 A30	2CSR256140R1207		0.480	1
		25	375821	DS203NC K25 A30	2CSR256140R1257		0.480	1
		32	779223	DS203NC K32 A30	2CSR256140R1327		0.480	1
	100	6	593423	DS203NC K6 A100	2CSR256140R2067		0.480	1
		8	581628	DS203NC K8 A100	2CSR256140R2087		0.480	1
		10	569824	DS203NC K10 A100	2CSR256140R2107		0.480	1
		13	594727	DS203NC K13 A100	2CSR256140R2137		0.480	1
		16	582922	DS203NC K16 A100	2CSR256140R2167		0.480	1
		20	571124	DS203NC K20 A100	2CSR256140R2207		0.480	1
		25	592426	DS203NC K25 A100	2CSR256140R2257		0.480	1
		32	580621	DS203NC K32 A100	2CSR256140R2327		0.480	1

RCBOs

DS203NC APR type



DS203NC - APR

DS203NC - APR type - C curve

Function: protection of end user three-phase circuits against overload and short-circuit currents; protection against the effects of sinusoidal alternating and direct pulsating earth fault currents, providing an optimal compromise between safety and continuity of service, thanks to the resistance to unwanted tripping; protection against indirect contact and additional protection against direct contact ($I_{\Delta n} = 30 \text{ mA}$); protection and isolation of resistive and inductive loads.

Application: commercial, industrial.

Standard: IEC/EN 61009-1; IEC/EN 61009-2-1

$I_{cn} = 6000 \text{ A}$

Number of poles	Rated residual current $I_{\Delta n} \text{ mA}$	Rated current $I_n \text{ A}$	Bbn 8012542 EAN	Order details		Price 1 piece	Weight 1 piece	Pack unit
				Type code	Order code		kg	pc.
3P+N	30	6	349822	DS203NC C6 APR30	2CSR256440R1064		0.480	1
		8	180722	DS203NC C8 APR30	2CSR256440R1084		0.480	1
		10	349723	DS203NC C10 APR30	2CSR256440R1104		0.480	1
		13	261520	DS203NC C13 APR30	2CSR256440R1134		0.480	1
		16	261421	DS203NC C16 APR30	2CSR256440R1164		0.480	1
		20	261322	DS203NC C20 APR30	2CSR256440R1204		0.480	1
		25	261223	DS203NC C25 APR30	2CSR256440R1254		0.480	1
		32	261124	DS203NC C32 APR30	2CSR256440R1324		0.480	1
	100	6	274223	DS203NC C6 APR100	2CSR256440R2064		0.480	1
		8	517924	DS203NC C8 APR100	2CSR256440R2084		0.480	1
		10	261025	DS203NC C10 APR100	2CSR256440R2104		0.480	1
		13	180029	DS203NC C13 APR100	2CSR256440R2134		0.480	1
		16	349624	DS203NC C16 APR100	2CSR256440R2164		0.480	1
		20	179924	DS203NC C20 APR100	2CSR256440R2204		0.480	1
		25	179825	DS203NC C25 APR100	2CSR256440R2254		0.480	1
		32	179726	DS203NC C32 APR100	2CSR256440R2324		0.480	1
	300	6	179627	DS203NC C6 APR300	2CSR256440R3064		0.480	1
		8	179528	DS203NC C8 APR300	2CSR256440R3084		0.480	1
		10	179429	DS203NC C10 APR300	2CSR256440R3104		0.480	1
		13	518020	DS203NC C13 APR300	2CSR256440R3134		0.480	1
		16	176329	DS203NC C16 APR300	2CSR256440R3164		0.480	1
		20	351023	DS203NC C20 APR300	2CSR256440R3204		0.480	1
		25	176220	DS203NC C25 APR300	2CSR256440R3254		0.480	1
		32	350927	DS203NC C32 APR300	2CSR256440R3324		0.480	1

RCBOs

DS203NC A  S type



DS203NC - A S

DS203NC - A S type - C curve

Function: protection of end user three-phase circuits against overload and short-circuit currents; protection against the effects of sinusoidal alternating and direct pulsating earth fault currents; protection against indirect contact and additional protection against direct contact ($I_{\Delta n} = 30 \text{ mA}$). Selective type.

Application: commercial, industrial.

Standard: IEC/EN 61009-1; IEC/EN 61009-2-1

$I_{cn} = 6\,000 \text{ A}$

Number of poles	Rated residual current $I_{\Delta n} \text{ mA}$	Rated current $I_n \text{ A}$	Bbn 8012542 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
				Type code	Order code			
3P+N	100	16	021827	DS203NC C16 A S100	2CSR256240R2164		0.480	1
		20	021728	DS203NC C20 A S100	2CSR256240R2204		0.480	1
		25	021629	DS203NC C25 A S100	2CSR256240R2254		0.480	1
		32	021520	DS203NC C32 A S100	2CSR256240R2324		0.480	1
	300	16	297727	DS203NC C16 A S300	2CSR256240R3164		0.480	1
		20	373223	DS203NC C20 A S300	2CSR256240R3204		0.480	1
		25	373124	DS203NC C25 A S300	2CSR256240R3254		0.480	1
		32	077527	DS203NC C32 A S300	2CSR256240R3324		0.480	1