

Zelio

Designed for hard-wired logic control applications to complement PLCs when performing simple functions such as counting, measurement and control, the single-function products in the Zelio range of relays offer optimum results.

Designed for the management of simple automation systems, Zelio Logic smart relays provide a real alternative to solutions based on cabled logic or specific cards.



2

The challenges of industrial competitiveness mean that control systems are now present in all fields of application. To meet your requirements, Schneider Electric has a very comprehensive offer of automation products, for all sectors of activity. Benefit from high performance, efficient and environmentally friendly products that are designed to reduce your energy costs and increase the safety of personnel and equipment.



Modicon

From the simplest machine to the smartest industrial process, Modicon automation platforms improve performance, quality and profitability for your installations. Conforming to international standards and simple to set up, the Modicon range integrates seamlessly into any control system.

2 | Automation



Relays

Electromechanical plug-in relays, Zelio Relay	2/2 to 2/4
Solid-state relays, Zelio Relay	2/5
Control and measurement relays, Zelio Control	2/6 to 2/10
Counters, Zelio Count	2/11
Timing relays, Zelio Time	2/12 to 2/13
Analog interface, Zelio Analog	2/14 to 2/15

Controllers (PLC) for commercial machines

Smart relays, Zelio Logic : 10 to 40 I/O	2/16 to 2/17
Programmable controllers, Twido : 10 to 100 I/O 1µs per Instruction	2/18 to 2/19

Controllers (PLC & PAC) for industrial machines

Logic controllers, Modicon M238 : 20 to 248 I/O, 0.3 µs per Instruction	2/20 to 2/21
Logic controllers, Modicon M258 : 42 to 2400 I/O, 0.022 µs per Instruction	2/22 to 2/23
Motion controllers, Modicon LMC058 : 42 to 2400 I/O, 4 synchronized Axis in 2ms	2/24
HMI controllers, Magelis XBTGC : 18 to 96 I/O	2/25
Drive controller, Altivar IMC : 1000 instructions in 942 µs Web Server, CANopen, PLCopen	2/26

Programmable Automation Controllers (PACs)

Mid range PLC Modicon M340 : for industrial process and infrastructure	2/28 to 2/37
Large PLC Modicon Premium : for discrete or process applications and high availability solutions	2/38 to 2/45
Large PLC Modicon Quantum : for process applications & high availability solutions	2/46 to 2/53

Software

Programming software, Zelio Soft 2	2/17
Programming software, Twido Suite	2/19
Machine programming software, SoMachine	2/27
Configuration software, Unity Pro	2/54 to 2/55
Programming software, PL7, Concept, ProWORX32	2/56 to 2/57
SCADA software, Vijeo Citect	2/58
Reporting software, Vijeo Historian	2/59



Type of relay	Interface relays RSB			Miniature relays RXM			
Contact characteristics							
Thermal current I _{th} in A (temperature ≤ 55°C)	8	12	16	12	10	6	3
Number of contacts	2 "C/O"	1 "C/O"	1 "C/O"	2 "C/O"	3 "C/O"	4 "C/O"	4 "C/O"
Contact material	AgNi	AgNi	AgNi	AgNi	AgNi	AgNi	AgAu
Switching voltage, min. / max.	5 / 250 VAC/DC			12 / 250 VAC/DC			
Switching capacity, min. / max. (mA / VA)	5 / 2000	5 / 3000	5 / 4000	10 / 3000	10 / 2500	10 / 1500	2 / 1500
Coil characteristics							
Average consumption, inrush,	0.75 VA / 0.45 W			1.2 VA / 0.9 W			
Permissible voltage variation	0.8/0.85...1.1 Un (50/ 60Hz or =)			0.8...1.1 Un (50 / 60Hz or =)			
References	(1)	(1)	(1)	(2)	(2)	(2)	
Coil supply voltage on DC	6 VDC	RSB2A080RD	RSB1A120RD	RSB1A160RD	–	–	–
	12 VDC	RSB2A080JD	RSB1A120JD	RSB1A160JD	RXM2AB2JD	RXM3AB2JD	RXM4AB2JD
	24 VDC	RSB2A080BD	RSB1A120BD	RSB1A160BD	RXM2AB2BD	RXM3AB2BD	RXM4AB2BD
	48 VDC	RSB2A080ED	RSB1A120ED	RSB1A160ED	RXM2AB2ED	RXM3AB2ED	RXM4AB2ED
	60 VDC	RSB2A080ND	RSB1A120ND	RSB1A160ND	–	–	–
110 VDC	RSB2A080FD	RSB1A120FD	RSB1A160FD	RXM2AB2FD	RXM3AB2ED	RXM4AB2ED	
Coil supply voltage on AC	24 VAC	RSB2A080B7	RSB1A120B7	RSB1A160B7	RXM2AB2B7	RXM3AB2B7	RXM4AB2B7
	48 VAC	RSB2A080E7	RSB1A120E7	RSB1A160E7	RXM2AB2E7	RXM3AB2E7	RXM4AB2E7
	120 VAC	RSB2A080F7	RSB1A120F7	RSB1A160F7	RXM2AB2F7	RXM3AB2F7	RXM4AB2F7
	220 VAC	RSB2A080M7	RSB1A120M7	RSB1A160M7	–	–	–
	230 VAC	RSB2A080P7	RSB1A120P7	RSB1A160P7	RXM2AB2P7	RXM3AB2P7	RXM4AB2P7
	240 VAC	RSB2A080U7	RSB1A120U7	RSB1A160U7	–	–	RXM4GB2U7

Sockets for relays

Type of socket	For interface relays RSB			For miniature relays RXM				
Mixed input/output type sockets with location for protection module								
	–	–	–	RXZE2M114(5)	–	RXZE2M114	RXZE2M114	
	–	–	–	RXZE2M114M(5)	–	RXZE2M114M	RXZE2M114M	
Separate input/output type sockets with location for protection module								
	RSZE1S48M	RSZE1S35M	RSZE1S48M(3)	RXZE2S108M	RXZE2S111M	RXZE2S114M	RXZE2S114M	
Protection modules								
Diode	6...230 VDC	RZM040W		RXM040W				
RC circuit	24...60 VAC	RZM041BN7		RXM041BN7				
	110...240 VAC	RZM041FU7		RXM041FU7				
Varistor	6...24 VDC or AC	RZM021RB (6)		RXM021RB				
	24...60 VDC or AC	RZM021BN (6)		RXM021BN				
	110...230 VDC or AC	RZM021FP (6)		RXM021FP				
	24 VDC or AC	–		–				
	240 VDC or AC	–		–				
Multifunction timer module	24...230 VDC or AC	–		–				
Accessories								
Plastic maintaining clamp	RSZR215			RXZR335				
Metal maintaining clamp	–			RXZ400				
Label for socket	RSZL300			RXZL420 (except RXZE2M114)				
Bus jumper	2 poles	–			RXZS2			
DIN rail adapter	–			RXZE2DA				
Panel mounting adapter	–			RXZE2FA				

(1) References for relays without socket, for relays with socket, add the letter **S** to the end of the selected reference. (Example: RSB2A080B7 becomes RSB2A080B7S).

(2) References for relays with LED, for relays without LED, replace the number 1 in the reference by **2**. (Example: RXM2AB2JD becomes RXM2AB1JD)

(3) To use RSB 1A160 ●● relay with socket, terminals must be interconnected

Universal and power relays



Universal relays RUM					Power relays RPM				RPF	
Cylindrics		Faston								
10	10	3	10	10	15	15	15	15	30 (4)	30 (4)
2 "C/O"	3 "C/O"	3 "C/O"	2 "C/O"	3 "C/O"	1 "C/O"	2 "C/O"	3 "C/O"	4 "C/O"	2 "N/O"	2 "C/O"
AgNi	AgNi	AgAu	AgNi	AgNi	AgNi	AgNi	AgNi	AgNi	AgSnO ₂	AgSnO ₂
12 / 250 VAC/DC					12 / 250 VAC/DC				12 / 250 VAC/DC	
10 / 2500	10 / 2500	3 / 750	10 / 2500	10 / 2500	100 / 3750	100 / 3750	100 / 3750	100 / 3750	100 / 7200	100 / 7200
2...3 VA / 1.4 W					0.9 VA / 0.7 W	1.2 VA / 0.9 W	1.5 VA / 1.7 W	1.5 VA / 2 W	4 VA / 1.7 W	
(2)	(2)	–	(2)	(2)	(2)	(2)	(2)	(2)	–	–
–	–	–	–	–	–	–	–	–	–	–
RUMC2AB2JD	RUMC3AB2JD	–	RUMF2AB2JD	RUMF3AB2JD	RPM12JD	RPM22JD	RPM32JD	RPM42JD	RPF2AJD	RPF2BJD
RUMC2AB2BD	RUMC3AB2BD	RUMC3GB2BD	RUMF2AB2BD	RUMF3AB2BD	RPM12BD	RPM22BD	RPM32BD	RPM42BD	RPF2ABD	RPF2BBD
RUMC2AB2ED	RUMC3AB2ED	RUMC3GB2ED	RUMF2AB2ED	RUMF3AB2ED	RPM12ED	RPM22ED	RPM32ED	RPM42ED	–	–
–	–	–	–	–	–	–	–	–	–	–
RUMC2AB2FD	RUMC3AB2FD	–	RUMF2AB2FD	RUMF3AB2FD	RPM12FD	RPM22FD	RPM32FD	RPM42FD	RPF2AFD	RPF2BFD
RUMC2AB2B7	RUMC3AB2B7	RUMC3GB2B7	RUMF2AB2B7	RUMF3AB2B7	RPM12B7	RPM22B7	RPM32B7	RPM42B7	RPF2AB7	RPF2BB7
RUMC2AB2E7	RUMC3AB2E7	RUMC3GB2E7	RUMF2AB2E7	RUMF3AB2E7	RPM12E7	RPM22E7	RPM32E7	RPM42E7	–	–
RUMC2AB2F7	RUMC3AB2F7	RUMC3GB2F7	RUMF2AB2F7	RUMF3AB2F7	RPM12F7	RPM22F7	RPM32F7	RPM42F7	RPF2AF7	RPF2BF7
–	–	–	–	–	–	–	–	–	–	–
RUMC2AB2P7	RUMC3AB2P7	RUMC3GB2P7	RUMF2AB2P7	RUMF3AB2P7	RPM12P7	RPM22P7	RPM32P7	RPM42P7	RPF2AP7	RPF2BP7
–	–	–	–	–	–	–	–	–	–	–

For universal relays RUM					For power relays RPM				For power relays RPF	
RUZH2M	RUZH3M	RUZH3M	–	–	RPZF1	RPZF2	RPZF3	RPZF4	–	–
–	–	–	–	–	–	–	–	–	–	–
RUZSC2M	RUZSC3M	RUZSC3M	RUZSF3M	RUZSF3M	–	–	–	–	–	–
RUW240BD	–	–	–	–	1 and 2 poles	–	3 and 4 poles	–	–	–
–	–	–	–	–	RXM040W	–	RUW240BD	–	–	–
RUW241P7	–	–	–	–	RXM041BN7	–	–	–	–	–
–	–	–	–	–	RXM041FU7	–	RUW241P7	–	–	–
–	–	–	–	–	RXM021RB	–	–	–	–	–
–	–	–	–	–	RXM021BN	–	–	–	–	–
–	–	–	–	–	RXM021FP	–	–	–	–	–
RUW242B7	–	–	–	–	RUW242B7	–	–	–	–	–
RUW242P7	–	–	–	–	–	–	RUW242P7	–	–	–
RUW101MW	–	–	–	–	–	–	RUW101MW	–	–	–
–	–	–	–	–	–	–	–	–	–	–
RUZH200	–	–	–	–	RPZF1 (for 1 pole relays)	–	–	–	–	–
RUZL420	–	–	–	–	–	–	–	–	–	–
RUZS2	–	–	–	–	–	–	–	–	–	–
–	–	–	–	–	RPZ1DA	RXZE2DA	RPZ3DA	RPZ4DA	–	–
–	–	–	–	–	RPZ1FA	RXZE2FA	RPZ3FA	RPZ4FA	–	–

(4) 30A with 13 mm space between relays; 25 A when relay mounting side by side

(5) Max 10 A operating

(6) With LED



Type of relay		Pre-assembled equipped with LED and protection circuit	
		Sold in lots of 10	
Contact characteristics			
Thermal current I _{th} in A	6		
Number of contacts	1 C/O		
Contact material	AgSnO ₂		
Switching voltage, min/max	12 / 300 V AC/DC		
Switching capacity min/max (mA /VA)	100 / 1500		
Coil characteristics			
Average consumption, inrush	0.17 W		
permissible voltage variation	-10% / +15%		
Socket connexion	Screw connector		Spring terminal
	Socket supply voltage	Coil supply voltage	
References	12 V AC/DC	12 V DC	RSL1PVJU
	24 V AC/DC	24 V DC	RSL1PVBU
	48 V AC/DC	48 V DC	RSL1PVEU
	110 V AC/DC	60 V DC	RSL1PVFU
	230 V AC/DC	60 V DC	RSL1PVPU
			RSL1PRJU
			RSL1PRBU
			RSL1PREU
			RSL1PRFU
			RSL1PRPU

RSL relays



Type of relay		Relay for customer assembly	
		Sold in lots of 10	
Number of contacts	1 C/O		
	Coil supply voltage		
References	12 V DC	RSL1AB4JD	
	24 V DC	RSL1AB4BD	
	48 V DC	RSL1AB4ED	
	60 V DC	RSL1AB4ND	

Sockets



Type of socket		Sockets for customer assembly with LED and protection circuit	
		Sold in lots of 10	
Socket connection	Screw connector		Spring terminal
	Socket supply voltage		
References	12 and 24 V AC/DC	RSLZVA1	RSLZRA1
	48 and 60 V AC/DC	RSLZVA2	RSLZRA2
	110 V AC/DC	RSLZVA3	RSLZRA3
	230 V AC/DC	RSLZVA4	RSLZRA4

Solid-state relays

SSRP relays



Type of relay	Panel mounted without heat sink and thermal interface					
Contact characteristics						
Thermal current I _{th} in A	10	25	50	75	90	125
Number of contacts	1 NO					
Type if switching	Zero voltage switching					
Output	SPST contact					
Connection	Screw connector					
Control voltage range	3...32 V DC			4...32 V DC		
Operating voltage	24...280 V AC			48...530 V AC	48...660 V AC	
References	SSRPCDS10A1	SSRPCDS25A1	SSRPCDS50A1	SSRPCDS75A2	SSRPCDS90A3	SSRPCDS125A3
Control voltage range						
Control voltage range	90...280 V AC					
Operating voltage	24...280 V AC			80...530 V AC	48...660 V AC	
References	SSRPP8S10A1	SSRPP8S25A1	SSRPP8S50A1	SSRPP8S75A2	SSRPP8S90A3	SSRPP8S125A3

2

SSRD relays



Type of relay	Rail DIN mounted With integrated heat sink			
Contact characteristics				
Thermal current I _{th} in A	10	20	30	45
Number of contacts	1 NO			
Type if switching	Zero voltage switching			
Output	SPST contact			
Connection	Screw connector			
Control voltage range	4...32 V DC			3...32 V DC
Operating voltage	24...280 V AC			
References	SSRD0S10A1	SSRD0S20A1	SSRD0S30A1	SSRD0S45A1
Control voltage range				
Control voltage range	90...280 V AC			90...140 V AC
Operating voltage	24...280 V AC			
References	SSRDP8S10A1	SSRDP8S20A1	SSRDP8S30A1	SSRDP8S45A1

Accessories



Type of accessory	Heat sink	Thermal interface
For relay	SSRP	
References	SSRAH1	SSRAT1

Zelio Control Relays

3-phase monitoring relays



2

Function	presence of phase +phase sequence		+phase sequence, +regeneration +phase unbalance, +under/over voltage	
Monitoring voltage range	208...480 VAC	208...440 VAC	208...480 VAC	220 ... 440 VAC
Outputs	1 C/O	2 C/O	1 C/O	2 C/O
References	RM17TG00	RM17TG20	RM17TE00	RM35TF30



Function	presence of phase +under/over voltage		+presence of neutral +under/over voltage
Monitoring voltage range	208...480 VAC	220...480 VAC	120...277 VAC (phase-neutral)
Outputs	1 C/O	2 C/O	2 C/O
References	RM17UB310	RM35UB330	RM35UB3N30

Level / Speed monitoring relays



Function	Conductive liquid level monitoring	Non-conductive material level monitoring	Over/under Speed monitoring
Power supply	24...240 VAC/DC		
Monitoring range	0,25...5 K Ω 5...100 K Ω 0,05...1 M Ω	Input of sensor : Contact / PNP / NPN	Interval between pulses: 0.05...0.5 s, 0.1...1 s, 0.5...5 s 1...10 s, 0.1...1 mn, 0.5...5 mn 1...10 mn
Output	2 C/O	1 C/O	1 C/O
Reference	RM35LM33MW	RM35LV14MW	RM35S0MW

Current / Voltage /Frequency monitoring relays



Function	Voltage Monitoring Under or Over Voltage		
Power Supply	24...240 VAC/DC 50/60Hz		
Monitoring range	0.05...0.5 V 0.3...3 V 0.5...5 V	1...10 V 5...50 V 10...100 V	15...150 V 30...300 V 60...600 V
Outputs	2 C/O		2 C/O
References	RM35UA11MW	RM35UA12MW	RM35UA13MW

2



Function	Voltage Monitoring Under or Over Voltage			Under and Over Voltage	
Power Supply	self powered			self powered	
Monitoring range	9...15 VDC	20...80 VAC/DC	65...260 VAC/DC	20...80 VAC/DC	65...260 VAC/DC
Outputs	1 C/O	1 C/O	1 C/O	1 C/O	1 C/O
References	RM17UAS14	RM17UAS16	RM17UAS15	RM17UBE16	RM17UBE15



Function	Current Monitoring		Frequency Monitoring
	over current	over or under current	Over or under frequency
Power supply	24...240 VAC/DC	24...240 VAC/DC 50/60 Hz	
Monitoring range	2...20 A built-in CT	2...20 mA 10...100 mA 50...500 mA	0.15...1.5 A 0.5...5 A 1.5...15 A
Output	1 C/O	2 C/O	2 C/O
Reference	RM17JC00MW	RM35JA31MW	RM35JA32MW
			RM35HZ21FM

Zelio Control Relays

Lift / Pump / Motor monitoring relays



2

Function	Lift motor room temperature monitoring		+phase presence +phase sequence
Power supply	24...240 VAC/DC 50/60Hz		
Monitoring range	input PT100 3 wires Under -1...+11 °C Over +34...+46 °C		208...480 VAC 50/60Hz input PT100 3 wires Under -1...+11 °C Over +34...+46 °C
Output	1 C/O	2 NO	2 C/O
Reference	RM35ATL0MW	RM35ATR5MW	RM35ATW5MW



Function	Pump protection Current monitor +3 phase monitor	Motor Protection Winding Temperature monitor +3 phase monitor	
Power supply	self powered (single phase :230 VAC 50/60 Hz)	24...240 VAC/DC	
Monitoring range	Current: 0.1...10 A Voltage (three phase): 208...480 VAC 50/60Hz	Winding Temperature: PTC sensor Three phase voltage: 208...480 VAC 50/60Hz	
Output	1 C/O	2 NO	2 NO
Reference	RM35BA10	RM35TM50MW	RM35TM250MW

Control relays for 3-phase supplies



Function	Rotational direction and presence of phases					
		+ Undervoltage	+ Over and undervoltage	+ Asymmetry		
Adjustable time delay	without	without	0.1...10 s	0.1...10 s	fixed, 0.5 s	0.1...10 s
Supply voltage	220...440V	380...440V	400V	380...440V	380...440V	380...440V
Output	2 C/O	2 C/O	2 C/O	2 C/O	1 C/O	2 C/O
References	RM4TG20	RM4TU02	RM4TR34 (1)	RM4TR32 (2)	RM4TA02	RM4TA32

(1) Relay with fixed voltage thresholds.

(2) Relay with adjustable voltage thresholds.

2

Current and voltage measurement relays

(3) Basic reference. To be completed with the letters indicating the required voltage, as shown below:

Voltage	VAC, 50/60 Hz	VDC
24...240 V	MW	MW
110...130 V	F	–
220...240 V	M	–
380...415 V	Q	–



Function	Detection of over and undervoltage					
	over and undercurrent		over and undervoltage			
Measuring range	3...30 mA	0.3...1.5 A	0.05 ...0.5 V	1...10 V	30...300 V	180...270 V
	10...100 mA	1...5 A	0.3 ...3 V	5...50 V	50...500 V	
Adjustable time delay	0.1...1 A	3...15 A	0.5...5 V	10...100 V		
	0.05...30 s	0.05...30 s	0.05...30 s	0.05...30 s	0.05...30 s	0.1...10 s
Output	2 C/O	2 C/O	2 C/O	2 C/O	2 C/O	2 C/O
References	RM4JA31** (3)	RM4JA32** (3)	RM4UA31** (3)	RM4UA32** (3)	RM4UA33** (3)	RM4UB35

(4) Basic reference. To be completed with the letters indicating the required voltage, as shown below:

Voltage	RM4-LG01	RM4-LA32	
	VAC, 50/60 Hz	VAC, 50/60 Hz	VDC
24 V	B	B	–
24...240 V	–	MW	MW
110...130 V	F	F	–
220...240 V	M	M	–
380...415 V	Q	Q	–



Liquid level control relays

Control relays	Empty or fill	
Sensitivity scale	5 ... 100 kΩ	0.25 ... 5 kΩ 2.5 ... 50 kΩ 25 ... 500 kΩ
Time delay	without	adjustable, 0.1 to 10 s
Output	1 C/O	2 C/O
References	RM4LG01• (4)	RM4LA32** (4)

Liquid level control probe type	Measuring electrode and reference electrode	1 simple stainless steel electrode in PVC protective casing
Mounting	suspended	suspended
Maximum operating temperature	100°C	100°C
References	LA9RM201	RM79696043



Type of relay			Size 24 x 48 mm - 1/32 DIN								
Input type			Thermocouple PT100 probe			Voltage/Current 1...5 V / 4...20 mA					
Integrated functions			Hysteresis, PID, auto-tuning, fuzzy logic, rampe 8 steps, automatic operating mode								
Alarm output			-		1		-		-		
Communication			ModBus			-		ModBus		ModBus	
Supply voltage			100...240 VAC			24 V AC/DC		100...240 VAC		24 V AC/DC	
References	Number/Output type	1/relay	REG24PTP1RHU	REG24PTP1ARHU	REG24PTP1RLU	REG24PUJ1RHU	REG24PUJ1RLU				
		1/solid-state	REG24PTP1LHU	REG24PTP1ALHU	REG24PTP1LLU	REG24PUJ1LHU	REG24PUJ1LLU				
		1/4-20 mA	REG24PTP1JHU	-	REG24PTP1JLU	-	-				



Type of relay			Format 48 x 48 mm - 1/16 DIN							
Input type			Universal							
Integrated functions			Hysteresis, PID, auto-tuning, fuzzy logic, rampe 16 steps, automatic and manual operating mode							
Alarm output			2							
Communication			ModBus			-		ModBus		
Supply voltage			100...240 VAC			24 V AC/DC				
References	Number/Output type	1/relay	REG48PUN1RHU	REG48PUN1ARHU	REG48PUN1RLU					
		2/relay	REG48PUN2RHU	-	REG48PUN2RLU					
		1/solid-state	REG48PUN1LHU	REG48PUN1LHU	REG48PUN1LLU					
		1 + 1 solid-state	REG48PUN2RLHU	-	REG48PUN2RLLU					
		1/4-20 mA	REG48PUN1JHU	-	REG48PUN1JLU					
		1/solid-state + 1/4-20 mA	REG48PUN2LJHU	-	REG48PUN2LJLU					



Type of relay			Size 96 x 48 mm - 1/8 DIN							
Input type			Universal							
Integrated functions			Hysteresis, PID, auto-tuning, fuzzy logic, rampe 16 steps, automatic and manual operating mode							
Alarm output			3							
Communication			ModBus			-		ModBus		
Supply voltage			100...240 VAC			24 V AC/DC				
References	Number/Output type	1/relay	REG96PUN1RHU	REG96PUN1ARHU	REG96PUN1RLU					
		2/relay	REG96PUN2RHU	-	REG96PUN2RLU					
		1/solid-state	REG96PUN1LHU	REG96PUN1LHU	REG96PUN1LLU					
		1 + 1 solid-state	REG96PUN2RLHU	-	REG96PUN2RLLU					
		1/4-20 mA	REG96PUN1JHU	-	REG96PUN1JLU					
		1/solid-state + 1/4-20 mA	REG96PUN2LJHU	-	REG96PUN2LJLU					

Zelio Count Counters Totalisers



Display	Mechanical				LCD
Supply voltage	24 VDC				Battery
Number of digits displayed	5	6	6	8	8
Counting frequency	20 Hz	10 Hz	25 Hz	25 Hz	7.5 kHz
Type of zero reset	Manual	Without	Manual	Without	Manual (1)
Front face dimensions, W x H	41.5 x 31 mm	30 x 20 mm	60 x 50 mm	60 x 50 mm	48 x 24 mm
Certifications	cUR	None	cUR	cUR	None
References	XBKT50000U10M	XBKT60000U00M	XBKT60000U10M	XBKT80000U00M	XBKT81030U33E

(1) With electrical interlocking.

2

Hours counters



Display	LCD
Supply voltage	Battery
Number of digits / display	8 (999,999.99 h)
Supply frequency	Mode: 1/100 hour
Type of zero reset	Manual (1)
Front face dimensions, W x H	48 x 24 mm
Certifications	None
References	XBKH81000033E

Multifunction counters



Display	LCD		LED			
Number of digits displayed	6					
Counting frequency	5 kHz					
Type of reset	Manual, electric and automatic					
Front face dimensions, W x H	48 x 48 mm					
Preselection number	1	2	1	2		
Certifications	cURus	cURus	cURus	cURus		
References	Supply voltage	24 VDC	XBKP61130G30E	XBKP61230G30E	XBKP62130G30E	XBKP62230G30E
		115 VAC	XBKP61130G31E	XBKP61230G31E	–	–
		230 VAC	XBKP61130G32E	XBKP61230G32E	XBKP62130G32E	XBKP62230G32E



Type of modular timer width 17.5 mm, relay output	On-delay	Multifunction		
External control	no	–	–	–
Supply voltage	24 VDC - 24 ...240 VAC	24 VDC - 24 ...240 VAC	12 ... 240VAC/DC	–
Timing range	0.1 s...100 h	0.1 s...100 h	0.1 s...10 h	0.1 s...100 h
Output	1 C/O	1 C/O	1 C/O	1 C/O
References	RE11RAMU	RE11RMMU (1)	RE11RMEMU (2)	RE11RMMW (1)

(1) Multifunction: On-delay, Off-delay, Totaliser, Symmetrical flashing, Chronometer, Pulse on energisation, Pulse output, Timing after closing/opening of control contact.

(2) Multifunction: On-delay, Off-delay, Totaliser, Symmetrical flashing, Chronometer, Pulse on energisation.



Type of modular timer width 17.5 mm, relay output	Asymmetrical flashing	Pulse on energisation	Off delay	Timing on impulse
External control	–	–	–	–
Supply voltage	24 VDC - 24...240 VAC			
Timing range	0.1 s...100 h	0.1 s...100 h	0.1 s...100 h	0.1 s...100 h
Output	1 C/O	1 C/O	1 C/O	1 C/O
References	RE11RLMU	RE11RHMU	RE11RCMU	RE11RBMU



Type of modular timer width 17.5 mm, solid-state output	On-delay	Off-delay	Multifunction (3)
Supply voltage	24...240 VAC/DC	24...240 VAC	24...240 VAC
Timing range	0.1 s...100 h	0.1 s...100 h	0.1 s...100 h
Output	solid-state	solid-state	solid-state
References	RE11LAMW	RE11LCBM	RE11LMBM

(3) Multifunction: On-delay, Off-delay, Totaliser, Symmetrical flashing, Chronometer, Pulse on energisation, Pulse output, Timing after closing/opening of control contact.



Panel-mounted relays	Timer on-delay	Asymmetrical flasher	Multifunction (4)	Multifunction (5)
Power supply	24...240 VAC/DC			
Time range	0,02 s...300 h			
Output	2 relay 5 A			
Reference	RE48ATM12MW	RE48ACV12MW	RE48AMH13MW (6)	RE48AML12MW
	Back panel mounting socket RUZC2M	RUZC3M	RUZC2M	RUZC3M
	Front panel mounting socket RE48ASOC8SOLD	RE48ASOC11SOLD	RE48ASOC8SOLD	RE48ASOC11SOLD

(4) Timer on-delay / pulse on energization

(5) Timer on-delay / calibrator / timer off-delay / symmetrical flasher

(6) 1 selectable in instantaneous

Industrial timers



Type of single function relay width 22.5 mm, relay output	On-delay		Off-delay		
	no	yes	no	yes	yes
External control	no	yes	no	yes	yes
Supply voltage	24 VAC/DC 110...240 VAC	24 VAC/DC 42...48 VAC/DC 110...240 VAC	24...240 VAC/DC	24 VAC/DC 42...48 VAC/DC 110...240 VAC	24 VAC/DC 42...48 VAC/DC 110...240 VAC
Timing range	0.05 s...300 h	0.05 s...300 h	0.05 s...10 mn	0.05 s...300 h	0.05 s...300 h
Output	1 C/O	2 C/O (1)	1 C/O	2 C/O (1)	1 C/O
References	RE7TL11BU	RE7TP13BU	RE7RB11MW	RE7RL13BU	RE7RM11BU

(1) 1 selectable in instantaneous mode.



Type of relay width 22.5 mm, relay output	Single function		Multifunction	
	Asymmetrical flashing	Pulse on energisation	6 functions (2)	8 functions (3)
External control	yes	no	–	–
Supply voltage	24 VAC/DC 42...48 VAC/DC 110...240 VAC	24 VAC/DC 110...240 VAC	24 VAC/DC 42...48 VAC/DC 110...240 VAC	24 VAC/DC 110...240 VAC
Timing range	0.05 s...300 h	0.05 s...300 h	0.05 s...300 h	0.05 s...300 h
Output	1 C/O	1 C/O	1 C/O	2 C/O (4)
References	RE7CV11BU	RE7PE11BU	RE7ML11BU	RE7MY13BU

(2) RE7ML11BU functions: On-delay, Off-delay, Pulse on energisation with start on energisation, Pulse on energisation with start on opening of remote control contact, Flashing with start during the OFF period, Flashing with start during the ON period.

(3) REMY13BU functions: On-delay, Off-delay, Pulse on energisation with start on energisation, Pulse on energisation with start on opening of remote control contact, Flashing with start during the OFF period, Flashing with start during the ON period, Star-delta starting with double On-delay timing, Star-delta starting with contact for switching to star connection.

(4) 1 selectable in instantaneous mode

Miniature plug-in relays, relay output



Functions			
Timing ranges	7 switchable ranges	0.1 s...1 s - 1 s...10 s - 0.1 min...1 min - 1 min...10 min - 0.1 h...1 h - 1 h...10 h - 10 h...100 h	
Relay output		4 timed C/O contacts	2 timed C/O contacts
Rated current		3 AC 5 A	AC 5 A
Voltages	24 VDC	RE XL4TMBD	RE XL2TMBD
	24 VAC 50/60 Hz	RE XL4TMB7	RE XL2TMB7
	120 VAC 50/60 Hz	RE XL4TMF7	RE XL2TMF7
	230 VAC 50/60 Hz	RE XL4TMP7	RE XL2TMP7
Socket with mixed contact terminals	With screw clamp	RXZE2M114	RXZE2M114
	With connector	RXZE2M114M	RXZE2M114M



2

Type	Thermocouple				
Temperature range	0...150 °C 32...302 °F	0...300 °C 32...572 °F	0...600 °C 32...1112 °F	0...600 °C 32...1112 °F	0...1200 °C 32...2192 °F
Output range	0...10 V / 0...20 mA - 4...20 mA Switchable				
Dimensions H x W x D	80 x 22,5 x 80 mm				
Voltage	24 VDC - Non isolated				
References	RMTJ40BD	RMTJ60BD	RMTJ80BD	RMTK80BD	RMTK90BD

Universal PT 100



Type	PT 100				
Temperature range	-40...40 °C -40...104 °F	-100...100 °C -148...212 °F	0...100 °C 32...212 °F	0...250 °C 32...482 °F	0...500 °C 32...932 °F
Output range	0...10 V / 0...20 mA - 4...20 mA Switchable				
Dimensions H x W x D	80 x 22,5 x 80 mm				
Voltage	24 VDC - Non isolated				
References	RMPT10BD	RMPT20BD	RMPT30BD	RMPT50BD	RMPT70BD

Optimum PT 100



Type	PT 100				
Temperature range	-40...40 °C -40...104 °F	-100...100 °C -148...212 °F	0...100 °C 32...212 °F	0...250 °C 32...482 °F	0...500 °C 32...932 °F
Output range	0...10 V				
Dimensions H x W x D	80 x 22,5 x 80 mm				
Voltage	24 VDC - Non isolated				
References	RMPT13BD	RMPT23BD	RMPT33BD	RMPT53BD	RMPT73BD

2

Universal Analog Converter



Type	Analog Converter			
Input range	0...10 V or 4...20 mA	0...10 V / -10...+10 V 0...20 mA 4...20 mA	0...50 V / 0...300 V 0...500 V	0...1,5 A / 0...5 A 0...15 A
Output range	0...10 V or 4...20 mA	0...10 V / -10...+10 V 0...20 mA 4...20 mA Switchable	0...10 V 0...20 mA 4...20 mA Switchable	0...10 V or 0...20 mA ou 4...20 mA
Dimensions H x W x D	80 x 22,5 x 80 mm			80 x 45 x 80 mm
Voltage	24 VDC - Non isolated	24 VDC - Isolated	24 VDC - Isolated	24 VDC - Isolated
References	RMCN22BD	RMCL55BD	RMCV60BD	RMCA61BD



Compact smart relays

With display, a.c. power supply

Supply voltage	24 VAC		48 VAC	100...240 VAC			
	Number of inputs/outputs	12	20	20	10	12	20
Number of inputs	Discrete inputs						
	8	12	12	6	8	12	12
Number of outputs	4 relay	8 relay	8 relay	4 relay	4 relay	8 relay	8 relay
Dimensions, W x D x H (mm)	71.2x59.5x107.6		124.6x59.5x107.6	71.2x59.5x107.6		124.6x59.5x107.6	
Clock	yes	yes	no	no	yes	no	yes
References	SR2B121B	SR2B201B	SR2A201E	SR2A101FU (1)	SR2B121FU	SR2A201FU (1)	SR2B201FU

(1) Programming on smart relay in LADDER language only



Compact smart relays

With display, d.c. power supply

Supply voltage	12 VDC		24 VDC			
	Number of inputs/outputs	12	20	10	12	20
Number of inputs	Discrete inputs					
	8	12	6	8	12	12
	including 0-10 V analogue inputs					
	4	6	-	4	2	6
Number of outputs	4 relay	8 relay	4 relay	4	8 relay	8
Dimensions, W x D x H (mm)	71.2x59.5x107.6		71.2x59.5x107.6		124.6x59.5x107.6	
Clock	yes	yes	no	yes	no	yes
References	SR2B121JD	SR2B201JD	SR2A101BD (1)	SR2B12●BD (2)	SR2A201BD (1)	SR2B20●BD (2)

(1) Programming on smart relay in LADDER language only

(2) Replace the ● by number 1 to order a smart relay with **relay output** or by 2 for a smart relay with **transistor output** (Example: SR2B121BD)



Compact smart relays

Without display and without buttons

Supply voltage	100...240 VAC			24 VDC		
	Number of discrete inputs/outputs	10	12	20	10	12
Number of inputs	Discrete inputs					
	6	8	12	6	8	12
	including 0-10 V analogue inputs					
	-	-	-	-	4	6
Number of outputs	4 relay	4 relay	8 relay	4 relay	4 relay	8 relay
Dimensions, W x D x H (mm)	71.2x59.5x107.6		124.6x59.5x107.6	71.2x59.5x107.6		124.6x59.5x107.6
Clock	no	yes	yes	no	yes	yes
References	SR2D101FU (1)	SR2E121FU	SR2E201FU	SR2D101BD (1)	SR2E121BD (3)	SR2E201BD (3)

(1) Programming on smart relay in LADDER language only

(3) To order a smart relay for a **24 VAC supply** (no analogue inputs), delete the letter **D** from the end of the reference (**SR2E121B** and **SR2E201B**)

Modular, SR3



Modular smart relays*	With display							
	24 VAC		100...240 VAC		12 VDC	24 VDC		
Supply voltage	24 VAC		100...240 VAC		12 VDC	24 VDC		
Number of inputs/outputs	10	26	10	26	26	10	26	
Number of inputs	Discrete inputs		6	16	6	16	6	16
	including 0-10 V analogue inputs		–	–	–	–	–	–
Number of outputs	4 relay		4 relay	10 relay	6	4	6	
	10 relay		–	–	10 relay	10 relay	4	10
Dimensions, W x D x H (mm)	71.2x59.5x107.6	124.6x59.5x107.6	71.2x59.5x107.6	124.6x59.5x107.6	124.6x59.5x107.6	71.2x59.5x107.6	124.6x59.5x107.6	
Clock	yes		yes	yes	yes	yes	yes	
References	SR3B101B	SR3B261B	SR3B101FU	SR3B261FU	SR3B261JD	SR3B10BD (1)	SR3B26BD (1)	

*The modular base can be fitted with one I/O extension module. The 24 VDC modular base can be fitted with one communication module and/or one I/O extension module

(1) Replace the ● by number 1 to order a smart relay with relay output (SR3B101BD) or by 2 for a smart relay with transistor output (SR3B102BD)



Extension modules for Zelio Logic SR3B●●●●● (2)	Communication		Discrete Inputs/Outputs			Analogue Inputs/Outputs
	Modbus	Ethernet				
Network			–			–
Number of inputs/outputs			6	10	14	4
Number of inputs	Discrete		4	6	8	–
	Analogue (0...10 V, 0...20 mA, PT100)		–	–	–	2 (1 PT100 max.)
Number of outputs	Relay		2 relay	4 relay	6 relay	–
	Analogue (0...10 V)		–	–	–	2
Dimensions, W x D x H (mm)	35.5x59.5x107.6		35.5x59.5x107.6	72x59.5x107.6		35.5x59.5x107.6
References	24 VAC		SR3XT61B	SR3XT101B	SR3XT141B	–
	100...240 VAC		SR3XT61FU	SR3XT101FU	SR3XT141FU	–
	12 VDC		SR3XT61JD	SR3XT101JD	SR3XT141JD	–
	24 VDC		SR3MBU01BD	SR3NET01BD	SR3XT61BD	SR3XT101BD
					SR3XT43BD	

(2) The power supply of the extension modules is provided via the Zelio Logic modular relays

Zelio Soft 2 software and programming tools



Zelio Soft 2 software, connecting cables, wireless connecting, memory	Multilingual programming software	Connecting cables				Wireless connection	Back-up memory
Description	CD ROM PC (Windows XP, Vista 32 bits and Windows 7 32 bits) (3)	Serial PC/Smart relay	USB PC/Smart relay	XBT N/R Interface	HMISTO Interface	Bluetooth interface	EEPROM
References	SR2SFT01	SR2CBL01	SR2USB01	SR2CBL08	SR2CBL09	SR2BTC01	SR2MEM02

(3) CD-ROM including Zelio Soft 2 programming software, an application library, a self-training manual, installation instructions and a user's manual

Communication interface for SR2/SR3

Interface, modems, Zelio Logic Alarm software	Communication interface	Modems (4)		Alarm management software
Supply voltage	12...24 VDC	12...24 VDC	12...24 VDC	–
Description	–	Analogue modem	GSM modem	PC CD-ROM (Windows 98, NT, 2000, XP)
Dimensions, W x D x H (mm)	72x59.5x107.6	120.7x35x80.5	111x 25.5x54.5	–
References	SR2COM01	SR2MOD01	SR2MOD02	SR2SFT02

(4) Must be used in conjunction with communication interface SR2COM01



2

Type de base		Compact			
		Non expandable bases		Expandable bases	
Number of digital I/O		10	16	24	40
Number of digital inputs (24 VDC)		6 sink/source	9 sink/source	14 sink/source	24 sink/source
Number of digital outputs		4 relay (2 A)	7 relay (2 A)	10 relay (2 A)	14 relay (2 A), 2 solid-state (1 A)
Type of connection		Screw terminals (non removable)			
Possible I/O expansion modules		–	–	4	7
Counting		3 x 5 kHz, 1 x 20 kHz			
PWM positioning		–			
Serial ports		1 x RS 485	1 x RS 485; option: 1 x RS 232C or RS 485		
Protocol		Modbus master/slave, ASCII, I/O relocation			
Ethernet port		–	–	–	RJ45 Ethernet
Dimensions, W x D x H		80 x 70 x 90 mm	80 x 70 x 90 mm	95 x 70 x 90 mm	157 x 70 x 90 mm
References	Supply voltage 100...240 VAC	TWDLCAA10DRF	TWDLCAA16DRF	TWDLCAA24DRF	TWDLCAE40DRF (1)
	Supply voltage 19.2...30 VDC	TWDLCAA10DRF	TWDLCAA16DRF	TWDLCAA24DRF	TWDLCAE40DRF (1)
	Real-time clock (option)	TWDXCPRTC			
	Display unit (option)	TWDXCPODC			
	Memory cartridge (option)	TWDXCPMFK32 (3)			TWDXCPMFK64 (4)

(1) 40 I/O version without Ethernet also available: TWDLCAA40DRF and TWDLCAE40DRF

Modular bases



Type of base		Modular		
Number of digital I/O		20		40
Number of digital inputs (24 VDC)		12 sink/source	12 sink/source	24 sink/source
Number of digital outputs		8 transistor, source (0.3 A)	6 relay (2 A) & 2 trans., source (0.3 A)	16 transistor, source (0.3 A)
Type of connection		HE10 connector	Removable screw terminals	HE10 connector
Possible I/O expansion modules		4	7	7
Supply voltage		24 VDC		
Counting		2 x 5 kHz, 2 x 20 kHz		
PLS/PWM positioning		2 x 7 kHz		
Serial ports		1 x RS 485; option: 1 x RS 232C or RS 485		
Protocol		Modbus master/slave, ASCII, I/O relocation		
Dimensions, W x D x H		35.4 x 70 x 90 mm	47.5 x 70 x 90 mm	47.5 x 70 x 90 mm
References		TWDLMDA20DTK (2)	TWDLMDA20DRT	TWDLMDA40DTK (2)
	Real-time clock (option)	TWDXCPRTC		
	Display unit (option)	TWDXCPODM		
	Memory cartridge (option)	TWDXCPMFK32 (3)	TWDXCPMFK64 (4)	

(2) Sink version transistor outputs also available: TWDLMDA20DUK and TWDLMDA40DUK

(3) Application backup, program transfer

(4) Memory expansion, application backup, program transfer

I/O expansion modules

For I/O expansion modules, please consult Modicon TM2 page 2/21

Communication modules



Type of module	Serial interface			Serial interface adaptor		
	Physical layer (non isolated)	RS 232C	RS 485		RS 232C	RS 485
Connection	Mini-DIN connector	Screw terminals		Mini-DIN connector	Screw terminals	
Protocol	Modbus master/slave, ASCII, I/O relocation					
Twido base compatibility	Modular base TWDLMDA			Compact base TWDLCAA16/24DRF		
References	TWDNOZ232D	TWDNOZ485D	TWDNOZ485T	TWDNAC232D	TWDNAC485D	TWDNAC485T

2



Type of module	Modem for Twido	CANopen expansion	Ethernet interface	Modbus isolation module	Modbus junction module
Number of modules	–	1	1	–	–
Connection	–	SUB-D9	RJ45	RJ45	RJ45
Twido base compatibility	–	20, 24 or 40 I/O base	All models	All models	All models
References	SR2MOD03	TWDNCO1M	499TWD01100	TWDXCAISO	TWDXCAT3RJ

(1) 2 modules max., 62 digital slaves max., 7 analogue slaves max., AS-Interface/M3, V 2.11 (profile S.7.4 not supported)

Programming software



Software, connecting cables, interfaces	TwidoSuite software EN/FR	Connecting cables		Bluetooth® USB adaptor	Bluetooth® gateway
Application	PC with Windows XP or Vista	Twido/PC USB port	Twido/PC serial port	For PC not fitted with Bluetooth®	For Twido controller
References	TWDBTFU10M	TSXUSB485 TSXCRJMD25	TSXPCX1031	VW3A8115	VW3A8114



SoMachine



Type of base	Compact			
Number of digital I/O	24 (removable battery to be ordered separately)			
Supply voltage	24VDC	100-240VAC	24VDC	100-240VAC
Number of digital inputs (24VDC)	14, 8 of which can be assigned as fast inputs			
Number of digital outputs	10 transistor, 4 of which can be configured as fast outputs	4 transistor + 6 relays	10 transistor, 4 of which can be configured as fast outputs	4 transistor + 6 relays
Type of connection	Removable screw terminal blocks (as standard) Removable spring terminal blocks (as option)			
Possible I/O expansion modules	7 modules: digital, analog, high-speed counter (3 max.), master AS-Interface (2 max.)			
High-speed counting (32 bits capacity)	8 x 100kHz simple channels, 4 x 100kHz simple channels + 1 x 100kHz advanced channels, or 2 x 100kHz advanced channels			
Motion or reflex functions	2 advanced channels, PWM:20kHz, PTO: 100kHz		4 advanced channels HSC reflex functions:100kHz	
PID Regulation	Yes			
Serial Ports	1 RS 232/485 (SL1) serial link		1 RS232/485 (SL1) serial link, 1 RS485 (SL2) serial link	
CANopen	-		1 master for 16 slaves max.	
Dimensions, W x D x H	157 x 86 x 118 mm			
References	TM238LDD24DT	TM238LDA24DR	TM238LFDC24DT	TM238LFAC24DR

High-speed counting modules



Type of module	High-speed counting	
Modularity	2 channels	
Maximum number of modules per base	3	
Number of sensor inputs	6 per channel	
Number of actuator outputs	2 per channel	
Capacity	31 bits + sign	
Frequency on inputs	60kHz	
Connection	1 screw terminal per channel	1 spring terminal per channel
References	TM200HSC206DT	TM200HSC206DF

Communication module and accessory



Designation	Ethernet interface	Program loader
Description	Ethernet Modbus/TCP	Kit: program loader, cable (USB/mini-B USB), 2 batteries (type AA/LR6)
Maximum number of modules per base	1	-
References	499TWD01100	TM2USBABDEV1

(1) Requires the use of a USB memory stick (not supplied)



Type of module		Analog inputs						
Number of inputs		2 I	2 I	4 I	8 I	8 I	8 I	8 I
Connection		Removable screw terminals						
Inputs		Range		Resolution				
		Thermocouples type K, J, T	0...10 V (1) 4...20 mA (2)	0...10 V (1) 0...20 mA (2) θ °C	0...10 V (1) 0...20 mA (2)	PTC/NTC	Thermo probe Pt100 / Pt1000 -200...+600 °C	
		12 bits (4096 points)			10 bits (1024 points)		12 bits (4096 points)	
Supply voltage		24 VDC						
Dimensions, W x D x H		23.5 x 70 x 90 mm					39.1x70x90 mm	
References		TM2AMI2LT	TM2AMI2HT	TM2AMI4LT	TM2AMI8HT	TM2ARI8HT	TM2ARI8LT	TM2ARI8LRJ

(1) Non differential

(2) Differential



Type of module		Analog Outputs, Inputs/Outputs (mixed)				
Number of inputs and/or outputs		1 O	2 O	2 I / 1 O	2 I / 1 O	4 I / 2 O
Connection		Removable screw terminals				
Inputs		Range		Resolution		
		–	–	0...10 V (1) 4...20 mA (2)	Thermocouple type K, J & T 3-wire Pt 100 thermal probe	0...10 V (1) 4...20 mA (2)
		–	–	12 bits (4096 points)	12 bits (4096 points)	12 bits (4096 points)
Outputs		Range		Resolution		
		0...10 V (1) 4...20 mA (2)	± 10 V	0...10 V (1) 4...20 mA (2)	0...10 V (1) 4...20 mA (2)	0...10 V (1) 4...20 mA (2)
		12 bits	11 bits + sign	12 bits	12 bits	12 bits
Supply voltage		24 VDC				
Dimensions, W X D x H		23.5 x 70 x 90 mm				
References		TM2AMO1HT	TM2AVO2HT	TM2AMM3HT	TM2ALM3LT	TM2AMM6HT

(1) Non differential

(2) Differential



Type of module		Digital Inputs/Outputs						
Number of inputs and/or outputs		8	16	16	32	4 I / 4 O	16 I / 8 O	
Connection		Removable screw terminals			HE10 connectors		Removable screw terminals	Spring terminals (non removable)
References		Inputs		Outputs				
		24 VDC sink	24 VDC sink/source	120 V sink	Relay (2 A)	Transistor, source 0.5 A	Transistor, source 0.4 A	
		TM2DDI8DT	–	–	–	–	–	
		–	TM2DDI16DT	TM2DDI16DK	TM2DDI32DK	–	–	
		TM2DAI8DT	–	–	–	–	–	
		TM2DRA8RT	TM2DRA16RT	–	–	–	–	
		TM2DDO8TT	–	–	–	–	–	
		–	–	TM2DDO16TK	TM2DDO32TK	–	–	
		TM2DDO8UT	–	TM2DDO16UK	TM2DDO32UK	–	–	
		–	–	–	–	TM2DMM8DRT	TM2DMM24DRF	
Inputs, 24 VDC + Outputs, Relais 2 A		–	–	–	–	–	–	



SoMachine



Controller type		42 digital I/O	42 digital I/O & CANopen
Internal memory	RAM	64 MB	
	Flash Eeprom	128 MB	
Typical Boolean instruction time		22 ns	
User program size		128 program K instructions	
Power supply		24 V DC	
Inputs	Digital	26 inputs 24VDC including 8 counter inputs (200 kHz)	
	Analog	-	
Outputs	Transistor	16 outputs (0,5A) including 4 reflex outputs (100 kHz)	
	Relay	-	
Optional communication ports		-	
Communication	USB-B mini-port	Programming port for SoMachine software	
	USB-A port	Connection of a USB memory stick for transferring programs, data files, firmware updates	
	RJ45 port (MBS)	RS232 serial link	
		RS485 serial link (supplies 250 mA, 5 V for HMI power supply)	
		Protocols: Modbus ASCII/RTU Master/Slave, ASCII (character string)	
SUB-D connector (CAN0)	-	CANopen bus master (63 slaves)	
RJ45 port (Ethernet)	Ethernet TCP, Ethernet IP, FTP server, Web server, Ethernet Modbus TCP		
Max. number of expansions		250 modules (local or remote) for digital IO, analog IO or Expert functions	
References		TM258LD42DT	TM258LF42DT



Controller type		42 digital I/O relays & CANopen	66 digital I/O & CANopen & 4 analog inputs
Internal memory	RAM	64 MB	
	Flash Eeprom	128 MB	
Typical Boolean instruction time		22 ns	
User program size		128 program K instructions	
Power supply		24 V DC	
Inputs	Digital	26 inputs 24VDC including 8 counter inputs (200 kHz)	38 inputs 24VDC including 8 counter inputs (200 kHz)
	Analog	-	4 analog inputs +10 V/-10V, 4-20mA/0-20 mA 12 bits resolution
Outputs	Transistor	4 reflex outputs (100 kHz)	28 outputs (0,5A) including 4 reflex outputs (100 kHz)
	Relay	12 relays	-
Optional communication ports		2 PCI slots for optional communication modules	
Communication	USB-B mini-port	Programming port for SoMachine software	
	USB-A port	Connection of a USB memory stick for transferring programs, data files, firmware updates	
	RJ45 port (MBS)	RS232 serial link	
		RS485 serial link (supplies 250 mA, 5 V for HMI power supply)	
		Protocols: Modbus ASCII/RTU Master/Slave, ASCII (character string)	
SUB-D connector (CAN0)	CANopen bus master (63 slaves)		
RJ45 port (Ethernet)	Ethernet TCP, Ethernet IP, FTP server, Web server, Ethernet Modbus TCP		
Max. number of expansions		250 modules (local or remote) for digital IO, analog IO or Expert functions	
References		TM258LF42DR	TM258LF66DT4L



Type of module	Input			Output			Input Output Digital
	Digital	Analog		Digital	Analog		
Number of inputs	12 sink	–	–	–	–	–	24
Number of outputs	–	–	–	12 source	4 relay	–	18
Number of inputs	–	4	4	–	–	–	–
Number of outputs	–	–	–	–	–	4	–
Nominal input current	24 VDC	–	–	–	–	–	24 VDC
Nominal output current	–	–	–	24 VDC	30 VDC/ 230 VAC	–	24 VDC
Type	–	Thermal probe	Voltage / Current	–	–	Voltage / Current	–
Associated bus sub-bases (2)							–
	TM5ACBM11	TM5ACBM11	TM5ACBM11	TM5ACBM11	TM5ACBM12	TM5ACBM11	
Associated terminal block (2)							–
	TM5ACTB12	TM5ACTB12	TM5ACTB12	TM5ACTB12	TM5ACTB32	TM5ACTB12	
References	TM5SDI12D	TM5SAI4PH	TM5SAI4L	TM5SDO12T	TM5SDO4R	TM5SAO4L	TM5C24D18T

(1) Modicon M258 and Modicon LMC058 controllers offer the possibility of creating IP20 or IP67 islands of remote I/O via the TM5 expansion bus. For Modicon TM7 (IP67) and Modicon TM5 (IP20) modular I/O systems, refer to the essential guide DIA3ED2070413EN or consult www.schneider-electric.com

(2) To be ordered separately

Modicon LMC058 Motion Controllers Bases



SoMachine



Controller type		42 digital I/O	42 digital I/O + 4 analog inputs
CANmotion Drive synchronisation	Up to 4 axes	2 ms	
	Up to 8 axes	4 ms	
Internal memory	RAM	64 MB	
	Flash Eeprom	128 MB	
Typical Boolean instruction time		22 ns	
Expert application	Relative and Absolute positioning	Yes	
	Velocity control	Yes	
	Homing	Yes	
	CNC visual editor	Yes	
	CAM profiles	Yes	
	Electronic gear	Yes	
	Interpolation	Yes	
	Shift Compensation	Yes	
Embedded number of digital inputs		26 including 8 high speed counter	
Embedded number of digital outputs		16 outputs transistor (0.5 A) including 4 reflex outputs	
Embedded number of analog inputs		–	4
Optional communication ports		–	2 PCI slots for optional communication modules
Communication	USB-B mini-port	Programming port for SoMachine software	
	USB-A port	Connection of a USB memory stick for transferring programs, data files, firmware updates	
	RJ45 port (MBS)	RS232 serial link RS485 serial link (supplies 250 mA, 5 V for HMI power supply) Protocols: Modbus ASCII/RTU Master/Slave, ASCII (character string)	
	SUB-D connector (CAN0)	CANopen bus master (63 slaves)	
	SUB-D connector (CAN1)	CANmotion bus master (63 slaves)	
	SUB-D connector (Encoder)	Encoder input (incremental or SSI)	
	RJ45 port (Ethernet)	Ethernet IP device	
		Ethernet TCP Modbus	
SoMachine protocol			
FTP server embedded Web server embedded			
Max. number of expansions		250	
References		LMC058LF42	LMC058LF424

I/O expansion modules

For I/O expansion modules, please consult Modicon TM5 page 2/23



SoMachine



Type		Characteristics		
Display	LCD screen size / Resolution	3,8" / QVGA	5,7" / QVGA	
	Type	STN monochrome, amber or red	STN monochrome, gray	STN 4096 colours
Functions	Representation of variables	Alphanumeric, bitmap, bargraph, gauge, button, light, clock, flashing light, keypad		
	Curves / Alarm logs	Yes, with log / Yes, incorporated		
	Control	5 languages IEC		
Communication	Serial link	–	1 Sub9 (RS 232/RS 422 - RS 485)	
	Networks	–	–	Ethernet, IEEE 802.3 10/100 BASE-T, RJ45
Downloadable protocols		Mitsubishi (Melsec), Omron (Sysmac), Rockwell Automation (Allen Bradley), Siemens (Simatic) Uni-TE, Modbus, Modbus TCP		
Development software		SoMachine (on Windows XP and Vista)		
Dimensions W x D x H (mm)		130 x 76 x 104	207 x 76 x 157	
Compatibility with PLCs		Twido, Modicon TSX Micro, Modicon Premium, Modicon Quantum, Modicon M340		
«Compact Flash» card slot		No		
USB port Host type A		1	1	1
Built-in Ethernet TCP/IP		No	No	Yes
Integrated I/O		12I/6O 24 VDC	16I/16O 24 VDC	
Extensions		2 modules TM2 or CANopen module	3 modules TM2 or CANopen module	
Supply voltage		24 VDC		
References	Source Output	XBTGC1100T	XBTGC2120T	XBTGC2230T
	Sink Output	XBTGC1100U	XBTGC2120U	XBTGC2230U

2

Extensions

Type of module	CANopen Master
Characteristics	Class M10 limited 16 slaves, Standard DS301 V4.02
References	XBTZGCCAN

Type of module	Digitals Inputs / Outputs						
Characteristics	8I 24 VDC Screw terminal	16I 24 VDC Screw terminal	16I 24 VDC HE10	32I 24 VDC HE10	8I 120 VAC Screw terminal	4I 24 VDC 40 Relays Screw terminal	16I 24 VDC 80 Relays Screw terminal
References	TM2DDI8DT	TM2DDI16DT	TM2DDI16DK	TM2DDI32DK	TM2DAI8DT	TM2DMM8DRT	TM2DMM24DRF

Type of module	Digitals Inputs / Outputs					
Characteristics	8O Transistor 24 VDC Screw terminal	16O Transistor 24 VDC HE10	32O Transistor 24 VDC HE10	8O Relays 230 VAC 30 VDC Screw terminal	16O Relays 230 VAC 30 VDC Screw terminal	–
References	Source Output	TM2DD08TT	TM2DD016TK	TM2DD032TK	TM2DRA8RT	TM2DRA16RT
	Sink Output	TM2DD08UT	TM2DD016UK	TM2DD032UK	–	–

Type of module	Analog Inputs / Outputs					
Characteristics	2I Current/Voltage	2I Thermocouple	4I Current/Voltage Temperature	8I Current/Voltage	8I Temperature	8I PTC
References	TM2AMI2HT	TM2AMI2LT	TM2AMI4LT	TM2AMI8HT	TM2ARI8LRJ TM2ARI8LT	TM2ARI8HT

Type of module	Analog Inputs / Outputs				
Characteristics	1O Current/Voltage	2O Voltage	2I Current/Voltage 1O Current/Voltage	2I Temperature 1O Current/Voltage	4I Current/Voltage 2O Current/Voltage
References	TM2AMO1HT	TM2AVO2HT	TM2AMM3HT	TM2ALM3LT	TM2AMM6HT

For HMI Controllers **Magelis XBTGT/GK** with control function, refer to the Essential guide DIA1ED2040506EN or consult www.schneider-electric.com



SoMachine

2

Type of card		Integrated controller card
Variable speed drive compatibility		Altivar 71 / Altivar 61 (1)
Power supply		24 VDC
Inputs	Digital	10 x 24 V DC inputs, 4 of which can be used for 2 high-speed counter inputs (100 kHz) or 2 incremental encoders (A/B) (100 kHz)
	Analog	2 x 0...20 mA inputs
Outputs	Digital	6 transistor outputs (2 A) - source
	Analog	2 x 0...20 mA outputs
Built-in communication ports	RJ45 port	Ethernet Modbus TCP, Web/FTP Server
	SUB-D connector (male 9-way)	Master CANopen bus (16 slaves)
	USB Mini-B port	SoMachine software programming
Real-time clock		Integrated
Typical time (for 1000 Boolean instructions)		942 µs
Data storage memory FRAM (Ferroelectric RAM)		64 KB
Compiled program size (saved in flash memory)		2 MB
User program size		1 MB
References		VW3A3521

(1) Refer to motion & drives essential guide or consult www.schneider-electric.com



Type of card	I/O expansion cards (2)	
Designation	I/O extension logic	Extended
Description	1 relay logic output ("C/O" contact) 4 x 24 VDC positive or negative logic inputs 2 x 24 VDC open collector positive or negative logic outputs 1 input for PTC probes	1 x 0...20 mA differential current analog input 1 software-configurable voltage (0...10 VDC) or current (0...20 mA) analog input 2 software-configurable voltage (±10V, 0...10 VDC) or current (0...20 mA) analog inputs 1 relay logic output ("C/O" contact) 4 x 24 VDC positive or negative logic inputs 2 x 24 VDC open collector positive or negative logic outputs 1 input for PTC probes 1 frequency control input
References	VW3A3201	VW3A3202

(2) Altivar 71 / 61 variable speed drives can only take one I/O expansion card with the same reference



SoMachine

Type	OEM machine programming software		
Compatibility	Modicon M238 - Logic controller Modicon M258 - Logic controller Modicon LMC058 - Motion controller Magelis XBT GC - HMI controllers XBT GT/GK with control function - HMI controllers Altivar IMC - Drive controller		
IEC 61131-3 Programming languages	IL (Instruction List) LD (Ladder Diagram) SFC (Sequential Function Chart) ST (Structured Text) FBD (Function Block Diagram) CFC (Continuous Function Chart)		
Languages	English French German Italian Spanish Simplified Chinese.		
System Requirements	Processor: Pentium 3 - 1.2 GHz or higher RAM Memory: 2 GByte; recommended: 3 GByte Hard Disk: 3.5 GB, recommended: 4 GB OS: Windows XP Professional, Windows Vista 32 Bit Drive: DVD reader Display: 1024 × 786 pixel resolution or higher Peripherals: a Mouse or compatible pointing device Peripherals: USB interface Web Access: Web registration requires Internet access		
Licence type	Trial (30 days)	1 (Single)	10 (Team)
References DVD	MSDCHNSFN30	MSDCHNLMUA	MSDCHNLMTA

2


Simplify machine programming and commissioning

The SoMachine software solution, developed specifically for OEM machine builders, allows you to design, commission and service your machine in a single environment. It helps you get to market faster and gives your machines a competitive advantage.

A single software suite to create and manage your complete automation solution from control and HMI to remote devices.

Flexible and Scalable Control platforms include:

- Controllers:
 - > HMI controllers: XBT GC, XBT GT/GK CANopen,
 - > Logic controllers: Modicon M238, Modicon M258,
 - > Motion Controller Modicon LMC 058,
 - > Integrated Controller Card Altivar IMC,
 - > Modicon TM2, TM5 and TM7 I/O offers
 - HMI:
 - > HMI Magelis graphic panels: XBT GT, XBT GK, HMI STO, HMI STU, XBT GH
- SoMachine is a professional, efficient, and open software solution integrating Vijeo-Designer. It integrates also the configuring and commissioning tool for motion control devices. It features all IEC 61131-3 languages, integrated field bus configurators, expert diagnostics and debugging, as well as outstanding capabilities for maintenance and visualisation.

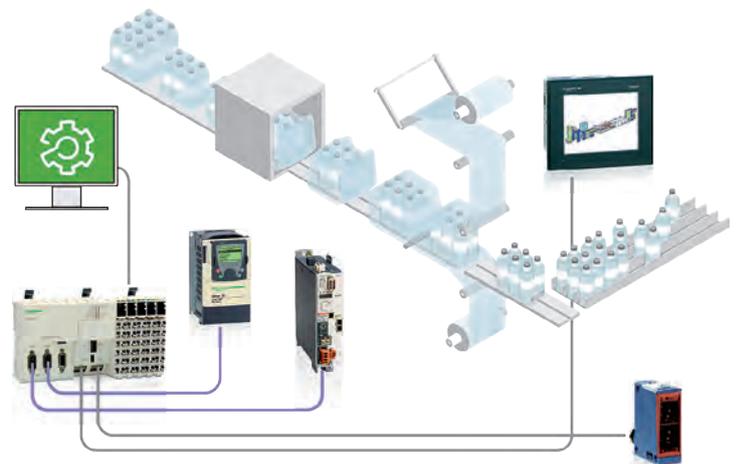

1

Software suite <small>for controllers, HMI, and remote devices.</small>	Download <small>to transfer the entire machine program in a single step</small>	Connection <small>to access to all devices</small>	File <small>Create and maintain a single project file</small>
---	---	--	---



Type of processor			Standard		High-performance		
Number of racks			2 (4, 6, 8 or 12 slots)		4 (4, 6, 8 or 12 slots)		
Maximum configuration			Maximum 24 slots for processor and modules (excluding power supply module)		Maximum 48 slots for processor and modules (excluding power supply module)		
Functions	Max. no. (1)	Discrete I/O	512		1024		
		Analog I/O	128		256		
	Control channels	Programmable loops (via CONT-CTL process control EFB library)					
	Counter channels	20		36			
	Motion control	–		Independent axes on CANopen bus (via MFB library)	–	Independent axes on CANopen bus (via MFB library)	
	Integrated connections	Ethernet TCP/IP	–				1 RJ45 port, 10/100 Mb/s, with Transparent Ready class B10 standard web server
		CANopen master bus Integrated port	–		1 (SUB-D9)	–	1 (SUB-D9)
		Serial link	1 RJ45 port, Modbus master/slave RTU/ASCII or character mode (non isolated RS 232C/RS 485), 0.3...19.2 Kb/s				–
		USB port	1 port, 12 Mb/s				
	Communication module	Ethernet TCP/IP	1 RJ45 port, 10/100 Mb/s with: - Transparent Ready class B30 standard web server with BMX NOE 0100 module - Transparent Ready class C30 configuration web server with BMX NOE 0110 module				
Internal user	Total capacity	2048 Kb		4096 Kb			
RAM	Program, constants and symbols	1792 Kb		3584 Kb			
	Data	128 Kb		256 Kb			
Execution time for one instruction	Boolean	0.18 µs		0.12 µs			
	On words or fixed point arithmetic	Single-length words	0.38 µs		0.25 µs		
		Double-length words	0.26 µs		0.17 µs		
	On floating points	1.74 µs		1.16 µs			
No. of K instructions executed per ms	100% Boolean	5.4 Kinst/ms		8.1 Kinst/ms			
	65% Boolean and 35% fixed arithmetic	4.2 Kinst/ms		6.4 Kinst/ms			
System overhead	Master task	1.05 ms		0.70 ms			
	Fast task	0.20 ms		0.13 ms			
References			BMXP341000	BMXP342000	BMXP3420102	BMXP342020	
					BMXP3420302		

(1) Only affects in-rack modules. The remote I/O on the CANopen bus are not included in these maximum numbers.

Memory cards



Type of card	8 MB memory card	8 MB memory card + 8 MB files	8 MB memory card + 128 MB files
Use	Supplied as standard with each processor. Used for:	As replacement for the memory card supplied as standard with each processor, used for:	
	Backup of program, constants, symbols and data		
	–	File storage, 8 MB	File storage, 128 MB
	Activation of class B10 web server		
Compatibility	BMXP341000/20...	BMXP3420...	
References	BMXRMS008MP	BMXRMS008MPF	BMXRMS0128MFP

2



Type of module		Ethernet Network Communication		
Speed		10/100 Mb/s		10/100 Mb/s
Protocols		Modbus TCP	TCP/IP (Uni-TE, Modbus)	EtherNet/IP and Modbus/TCP
Conformity class		Transparent Ready class B30		
Communication service	I/O Scanning service	Yes		Yes
Transparent Ready	FDR service	Yes (client/server)		Yes (client / server)
	SNMP network management service	Yes		Yes (agent)
	Global Data service	Yes		No
	SOAP/XML Web service	No	Server	-
	Bandwidth management	Yes		Yes
	Qos	-		Yes
	RSTP	-		No SOAP
References		BMXNOE0100	BMXNOE0110	BMXNOC0401
Memory card	Use	Provides services conforming to Transparent Ready: Class B		No
			Class C 32 MB available for user web pages	
References		BMXRWSB000M	BMXRWSFC032M	

Qos: Quality of Service - RSTP: Rapid Spanning Tree Protocol



Type of module		PROFIBUS DP V1		
Designation		PROFIBUS Remote Master (Ethernet Modbus TCP/PROFIBUS DP V1) compatible with all programmable automation under UNITY and supporting the I/O scanning service		
		Standard version 0...65°	Hardened version -25...70°, varnished	
Speed		9.6 Kb...12 Mb		
Interface		RS485 isolated (Sub-D 9 pin female connector)		
PROFIBUS Services		Master Class 1 and 2, support for 125 slaves, Sync & Freeze, Extended diagnostics. Delivered with communication DTM allowing any FDT tool to access the PROFIBUS slaves from the Ethernet network by way of the PROFIBUS Remote Master		
References		TCSEGPA23F14F	TCSEGPA23F14FK	

Type of module	Serial link (1)	AS-Interface (1)
Number of interfaces	2	1
Speed	115 Kbits/s	-
Profile	-	M4 (AS-i V3)
References	BMXNOM0200	BMXEIA0100

(1) For BMXNOC0401 (EtherNet/IP), Profibus DP Gateway TSX EGPA23F14F, Modbus Plus Gateway TCS EGDB23F24FA

Communication modules



Type of module		RTU communication
Designation		Communication
Protocols		IEC 60870-5-101, DNP3 (subset level 3), Modbus/TCP, IEC 60870-5-104, DNP3 IP, DNP3 (subset level 3), Multi-protocols master slave
Ports	Ethernet port	10BASE-T/100BASE-TX or PPPoE (PPP Protocol over Ethernet) for ADSL external modem
	Serial port	Non-isolated RS 232/485 (Serial link) or RS232 external modem (Radio, PSTN, GSM, GPRS/3G)
Conformity class		Transparent Ready class C30
Transparent Ready communication services	I/O Scanning service	-
	Global Data service	-
	NTP me synchronization	Yes
	FDR service	Yes (client)
	SMTP e-mail notification service	Yes
	SOAP/XML Web service	Server
	SNMP network management service	Yes (agent)
RTU communication services	Master or Slave configuration	Yes, IEC101/104 and DNP3, with Pull through routing of events
	RTU clock synchronization	via RTU protocol or NTP
	Time stamped data and events exchanges	Yes, IEC101/104 and DNP3, polled interrogations, Report by exception (RbE), unsolicited responses
	Time stamped events buffering and date stamped events	up to 100000 events, backup of events on power fail (10000)
	Automatic bacfill of time stamped events to Master/SCADA	Yes, on network disconnection/reconnection
	Data logging service	in CSV files in SD card memory (128 MB)
	Email/SMS service	Alarm and report notification
Memory Card	SD card 128 MB	Web server and Data logging CSV files
Reference		BMXNOR0200H



Type of module	Power supply modules				
Voltage	24 VDC isolated	24...48 VDC isolated	100...240 VAC		
Nominal input current	1A at 24 VDC	1.65 A at 24 VDC 0.83 A at 48 VDC	0.61 A at 115 VAC 0.31 A at 220 VDC	1.04 A at 0.52 A	100...150 VDC
Micro-break duration	≤ 1				
Integrated protection	Via internal fuse (not accessible)				
Max. useful power	17W	32 W	20 W	36 W	
Max. dissipated power	8.5 W				
Removable connectors (set of 2)	supplied as standard	BMXXTSCPS10 (cage clamp)			
	to be ordered separately	BMXXTSCPS20 (spring-type)			
References	BMXCPS2010	BMXCPS3020	BMXCPS2000	BMXCPS3500	BMXCPS3504 (1)

Racks



Designation	Racks			
Type of modules to be installed	BMX CPS power supply, BMX P34 processor, I/O modules and application-specific modules (counter, communication)			
No. of slots	4	6	8	12
References	BMXXBP0400	BMXXBP0600	BMXXBP0800	BMXXBP1200

Rack extensions

Designation	Rack extension module	Kit for rack extension
	Standard module to interconnect rack	A complete assembly kit for to racks distant from 0.8 m or less
References	BMXXBE1000	BMXXBE2005



Type of module			DC input modules					
Number of inputs			16	16	32	64	16	16
Connection			Screw or spring-type 20-way removable terminal block		1 connector 40-way	2 connectors 40-way	Screw or spring-type 20-way removable terminal block	
Nominal input values			Voltage		24 V	48 V	24 V	125 VDC
			Current		3.5 mA	2.5 mA	1 mA	3 mA
			Logic		Positive (<i>sink</i>)			Negative (<i>source</i>)
Input limit values			At state 1		Voltage		≥11 V	≥34 V
					Current		> 2 mA (for U ≥11 V)	> 2 mA (for U ≥34 V)
			At state 0		Voltage		< 5 V	< 10 V
					Current		≥1.5 mA	≥0.5 mA
References			BMXDDI1602	BMXDDI1603	BMXDDI3202K	BMXDDI6402K	BMXDAl1602	BMXDDI1604 (1)

2



Type of module			AC input modules					
Number of inputs			16			8		
Connection			Screw or spring-type 20-way removable terminal block					
Nominal input values			Voltage		24 VAC	48 AC		
			Current		3 mA	10.4 mA		
			Frequency		50/60 Hz			
Input limit values			At state 1		Voltage		≥15 V	≥34 V
					Current		≥2 mA	≥74 V
			At state 0		Voltage		≤5 V	≤10 V
					Current		≤1 mA	≤20 V
References			BMXDAl1602	BMXDAl1603	BMXDAl1604	BMXDAl0805 (2)		



Type of module			DC solid state output modules			
Number of inputs			16	16	32	64
Connection			Screw or spring-type 20-way removable terminal block		One 40-way connector	Two 40-way connectors
Nominal output values			Voltage		24 VDC	
			Current		0.5 V	0.1 V
			Logic		Positive (<i>source</i>)	Negative (<i>sink</i>)
Output limit values			Voltage (ripple included)		19...30 (possible up to 34 V, limited to 1 hour in every 24 hours)	
			Current per channel		0.625 A	0.125 A
			Current per module			
Maximum dissipated power			4	2.26	3.6	6.85
References			BMXDDO1602	BMXDDO1612	BMXDDO3202K	BMXDDO6402K



Type of module		Triac output modules	
Number of inputs		16	
Connection		Screw or spring-type 20-way removable terminal block	
Operating voltage	Nominal	100...240 VAC	
	Limit	85...288 VAC	
Currents	Maximum	0.6 per channel, 2.4 per common, 4.8 for all 4 commons.	
	Minimum	25 mA at 100 V a, 25 mA at 240 V a.	
Maximum inrush current		≤ 20/cycle	
Reference		BMXDAO1605	



Type of module		Relay output modules		
Number of inputs		8	16	8
Connection		Screw or spring-type 20-way removable terminal block		
Max. operating voltage	DC	10...34 VDC	24...125 VDC (resistive load)	
	AC	10...264 VAC	200...264 VAC (Cosφ = 1)	100...150 VDC
Response time	Activation	< 10 ms		
	Deactivation	< 8 ms	< 12 ms	
Dissipated power		2.7 W max	3 W	
References		BMXDRA0805	BMXDRA1605	BMXDRA0804 (1)



Type of module		24 VDC mixed I/O modules			
		Inputs		Solid state outputs	
Number of I/O		8		8	
Connection		Screw or spring-type 20-way removable terminal block		One 40-way connector	
Input limit values	At state 1	Voltage	≥11V		≥11V
		Current	≥3 mA (for U ≥11)		≥2 mA (for U ≥11)
	At state 0	Voltage	5 V		5 V
		Current	≤1.5 mA		≤1.5 mA
Sensor power supply (ripple included)		19...30 V (possible up to 30 V, limited to 1 hour in every 24 hours)			
Output limit values	Voltage (ripple included)		19...30 (possible up to 30 V, limited to 1 hour in every 24 hours)		
	Current	per channel	0.625 A		0.125 A
per module		5 A		3.2 A	
Maximum dissipated power		3.7 W		4 W	
References		BMXDDM16022		BMXDDM3202K	

Discrete I/O modules



Type of module		Mixed input/relay output modules	
		24 VDC inputs	24 VDC or 24...240 VAC relay outputs
Number of I/O		8	8
Connection		Screw or spring-type 20-way removable terminal block	
Nominal values	Inputs	Voltage	24 VDC (positive logic)
		Current	3.5 mA
	Outputs	DC voltage	24 VDC
		DC	2 (resistive load)
		AC voltage	220 VAC, Cosφ = 1
AC	2 A		
Input limit values	At state 1	Voltage	≥11V
		Current	≥2 mA (for U ≥ 11 V)
	At state 0	Voltage	5 V
		Current	≤1.5 mA
Sensor power supply (ripple included)		19...30 V (possible up to 30 V, limited to 1 hour in every 24 hours)	
Maximum dissipated power		3.1 W	
Reference		BMXDDM16025	

2



Counter and motion control modules



Type of module	Analog input module				
Input type	Isolated high-level inputs	Isolated high-level inputs	Non isolated high-level inputs	Isolated inputs, low-level voltage, resistors, temperature probes, thermocouples	
Number of channels	4	8	8	4	8
Nature of inputs	± 10 V, ± 5 V, 0...5 V, 0...10 V, 1...5 V 0...20 mA, 4...20 mA, ± 20 mA			±40 mV, ±80 mV, ±160 mV, ±320 mV, ±640 mV, ±1.28 V	
Resolution	0.35 mV/0.92 µA			15 mV + sign	
References	BMXAMI0410	BMXAMI0810 (1)	BMXAMI0800 (1)	BMXART0414	BMXART0814

Type of module	Analog output module		
Output type	Isolated high-level outputs		Non isolated high-level outputs
Number of channels	2	4	8
Range	Voltage	± 10 V	–
	Current	0...20 mA and 4...20 mA	–
Resolution	15 bits + sign		
References	BMXAMO0210	BMXAMO0410 (1)	BMXAMO0802 (1)

Type of module	Mixed analog I/O module	
Channel type	Non-isolated high-level inputs	Non-isolated high-level outputs
Number of channels	4	2
Ranges	±10 V, 0...5 V, 0...10 V, 1...5 V, 0...20 mA, 4...20 mA	
Maximum conversion value	Voltage	± 11.25 V
	Current	0...30
Resolution	14 bits, 12 bits, 13 bits, 12 bits	12 bits, 11 bits
Reference	BMXAMM0600	

Type of module	Counter module			Motion Control Module
	32 bits	16 bits	32 bits	
Modularity	2 channels	8 channels	4 channels	4 channels
No. of sensor inputs	6 per channel	2 per channel	3 per channel	4 auxiliary inputs
No. of actuator outputs	2 per channel			2 auxiliary outputs
Module cycle time	1 ms	5 ms		–
Applications	Upcounting, downcounting, measurement, frequency meter, frequency generator, axis following	Upcounting, downcounting, measurement		Frequency generator, Move, set position
References	BMXEHC0200	BMXEHC0800		BMXMSP0200



Type of module	SSI encoder interface
Number of channels	3
Encoder support	8 to 31 bits, 24V
Auxiliary input	2
Reflex output	3
Baud rate	100K to 1MHz
Module cycle time	1 ms
Functions	Capture, compare and event, modulo, reduction, offset
Reference	BMXEAE0300

2

Connection accessories



Removable terminal blocks	20-way			28-way	
	For use with modules	BMX AMI 0410 - BMX AM0 0210 - BMX AMM 0600 - BMX EHC 0800			BMX MSP 200, BMX AMI 0800 / AMI 0810
For use with TOR modules	All 8 and 16 channel modules				
Composition	Cage clamp	Screw clamp	Spring-type	–	–
Type of connection	–	–	–	Spring-type	Screw clamp
References	BMXFTB2000	BMXFTB2010	BMXFTB2020	BMXFTB2820	BMXFTB2800

Some racks, power supply, communication modules and specific modules, plus all the analog modules are now available in «ruggedized version». The references of these products end by a H.



Type of processor		TSX 5710 4 racks max.	TSX 5720 16 racks max.	TSX 5730 16 racks max.
Number of I/O in racks	Discrete	512	1024	1024
	Analog	24	80	128
Integrated process control		No / Yes	30 loops / Yes	45 loops / Yes
Application-specific channels (counter, position control, weighing)		8	24	32
Bus	AS-Interface cabling system	2	4	8
	CANopen machine bus	1	1	1
	INTERBUS, Profibus DP fieldbus	–	1	3
Networks (Ethernet, Modbus Plus, Fipway)		1	2	3
Memory capacity	Without PCMCIA extension	96 Kb data/prog.	160/192 Kb data/prog. (1)	192/208 Kb data/prog. (1)
	With PCMCIA extension	96 Kb data/224 Kb prog.	160/192 Kb data (1)/768 Kb prog.	192/208 Kb data (1)/1,75 MB prog.
Execution time for one instruction without ext. PCMCIA	Boolean	0.19 µs	0.19 µs	0.12 µs
	On word or arithmetic	0.25 µs	0.25 µs	0.17 µs
Reference	Without integrated port	TSXP57104M (6)	TSXP57204M (6)	TSXP57304M (6)
	Integrated Ethernet	TSXP571634M (2) (6)	TSXP572634M (6)	TSXP573634M (6)
	Integrated CANopen	–	–	–
	Integrated Fipio	TSXP57154M (6)	TSXP57254M (6)	TSXP57354M (6)

Processors under PL7 software



Type of processor		TSX 5710 4 racks max.	TSX 5720 16 racks max.	TSX 5730 16 racks max.
Number of I/O in racks	Discrete	512	1024	1024
	Analog	24	80	128
Integrated process control		No	30 loops	45 loops
Application-specific channels (counter, position control, weighing)		8	24	32
Bus	AS-Interface cabling system	2	4	8
	CANopen machine bus	1 (with TSXP57103M)	1	1
	INTERBUS, Profibus DP fieldbus	–	1	2
Networks (Ethernet, Modbus Plus, Fipway)		1	1	3
Memory capacity	Without PCMCIA extension	32 K words data/prog.	48 K words data/prog. (4)	64/80 K words data/prog. (4)
	With PCMCIA extension	32 K words data/64 K words prog.	32 K words data (4)/160 K words prog.	80/96 K words data (4)/384 K words prog.
Execution time for one instruction without ext. PCMCIA	Boolean	0.19 µs	0.19 µs	0.12 µs
	On word or arithmetic	0.25 µs	0.25 µs	0.17 µs
Reference	Without integrated port	TSXP57103M (6)	TSXP57203M (6)	TSXP57303AM (6)
	Integrated Ethernet	–	TSXP572623M (6)	TSXP573623AM (6)
	Integrated Fipio	TSXP57153M (6)	TSXP57253M (6)	TSXP57353AM (6)
	Integrated Ethernet and Fipio	–	TSXP572823M (6)	–

(1) The second value corresponds to the integrated memory capacity when the processor is equipped with a Fipio manager integrated link

(2) Processor with double format

(3) PC format card on PCI bus

(4) The second value corresponds to the processor with integrated Fipio bus manager link.

(5) with PL7 V4.4 min.

(6) For coated version add C at the end of the reference: example **TSXP571634M** becomes **TSXP571634MC**

HotStandBy offer



	TSX 5740 16 racks max.	TSX 5750 16 racks max.	TSX 5760 16 racks	TSXH5724M 16 racks	TSXH5744M 16 racks
	2048	2048	2048	512	512
	256	512	512	80	128
	60 loops / Yes	90 loops / Yes	90 loops / Yes	30 loops / Yes	60 loops / Yes
	64	64	64	16 (serial communication)	16 (serial communication)
	8	8	8	0	0
	1	1	1	0	0
	4	5	5	0	0
	4	4	4	2	4
	320 Kb data/prog.	1024 Kb data/prog.	2048 Kb data/prog.	192 Kb	440 Kb
	440 Kb data/2 MB prog.	1024 Kb data/7 MB prog.	2048 Kb data/7 MB prog.	192 Kb data/768 Kb prog.	440 Ko data/2 MB prog.
	0.06 µs	0.037 µs	0,037 µs	0,039 µs	0,039 µs
	0.07 µs	0.045 µs	0,045 µs	0,054 µs	0,054 µs
	-	-	-	TSXH5724M (6)	TSXH5744M (6)
	TSXP574634M (6)	TSXP575634M (6)	TSXP576634M (6)		
	-	-	-		
	TSXP57454M (6)	TSXP57554M (6)	-		

2

Modicon Premium Programmable Automation Controller

Memory extensions for Unity Pro processors



2

Type of PCMCIA card		Application		Additional data
Technology		SRAM	Flash EPROM only	SRAM
Memory size	96 Kb	–	TSXMFPB096K (3)	–
	128 Kb	TSXMRPP128K	TSXMFP128K	–
	224 Kb	TSXMRPP224K / TSXMCP224K	TSXMFP224K	–
	384 Kb	TSXMRPP384K	TSXMFP384K	–
	448 Kb	TSXMRPC448K (1)	–	–
	512 Kb	–	TSXMCP512K (2) / TSXMFP512K	–
	768 Kb	TSXMRPC768K (1)	–	–
	1 MB	TSXMRPC001M (1) (6)	TSXMFP001M	–
	1.7 MB	TSXMRPC01M7	–	–
	2 MB	TSXMRPC002M (1)	TSXMCP002M (2) / TSXMFP002M	–
	3 MB	TSXMRPC003M (1) (6)	–	–
	4 MB	–	TSXMFP004M	TSXMRPF004M
	7 MB	TSXMRPC007M (1) (6)	–	–
	8 MB	–	–	TSXMRPF008M

(1) By configuration, the user can reserve part of the memory space for data storage (recipes, production data) on request.

(2) These cards have an additional SRAM area for storing data (recipes, production data).

(3) Backup cartridge of the program when this one reside entirely in PLC internal memory.

Memory extensions for PL7 processors



Type of PCMCIA card		Application		Additional data
Technology		SRAM	Flash EPROM only	SRAM
Memory size (4)	32 K words	TSXMRPP128K	TSXMFP128K	–
	64 K words	TSXMRPP224K	TSXMFP224K	–
	64 K words/128 K words	TSXMRPP384K	TSXMCP224K	–
	96 K words	–	TSXMFPB096K	–
	128 K words	TSXMRPC448K	TSXMFP384K	–
	128 K words/128 K words	TSXMRPC768K (5)	–	–
	256 K words	TSXMRPC001M (6)	–	–
	256 K words/640 K words	TSXMRPC01M7 (5)	–	–
	384 K words/640 K words	TSXMRPC002M	–	–
	512 K words	TSXMRPC003M (5) (6)	–	–
	992 K words/640 K words	TSXMRPC007M (6)	–	–
	2048 K words	–	–	TSXMRPF004M

(4) The 1st value corresponds to the size of the application area, the second to the size of the additional data area for storing data (recipes, production data, etc).

(5) These cards have an additional SRAM area for storing application object symbols.

(6) For coated version add C at the end of the reference: example **TSXMRPC001M** becomes **TSXMRPC001MC**

Power supply modules ⁽¹⁾



Type of power supply module for	Premium					Atrium ⁽²⁾
Input voltage	24 VDC		100...240 VAC	100...120/200...240 VAC		24 VDC
Output voltage	5 VDC/24 VDC					
Total useful power	26 W	50 W	26 W	50 W	77 W	26 W
Format	Standard	Double	Standard	Double	Double	–
Reference	TSXPSY1610M ⁽⁴⁾	TSXPSY3610M ⁽⁴⁾	TSXPSY2600M ⁽⁴⁾	TSXPSY5500M ⁽⁴⁾	TSXPSY8500M ⁽⁴⁾	TSXPSI2010

(1) Process power supplies see chapter 6 "Power supply"

(2) Only for Atrium slot-PLCs under Unity

2

Racks



Type of rack	Non extendable		Extendable
For configuration	Mono-rack		Multi-rack (16 max.)
	Dimensions WxDxP		
Reference	4 positions	188 x 160 x 151,5 mm ⁽³⁾	–
	6 positions	261,6 x 160 x 151,5 mm ⁽³⁾	TSXRKY6 ⁽⁴⁾
	8 positions	335,3 x 160 x 151,5 mm ⁽³⁾	TSXRKY8 ⁽⁴⁾
	12 positions	482,6 x 160 x 151,5 mm ⁽³⁾	TSXRKY12 ⁽⁴⁾
			TSXRKY4EX ⁽⁴⁾
			TSXRKY6EX ⁽⁴⁾
			TSXRKY8EX ⁽⁴⁾
			TSXRKY12EX ⁽⁴⁾

(3) Height of I/O modules : 151,5 mm with HE 10 or SUB-D connectors, 165 mm with screw terminals

(4) For coated version add C at the end of the reference: example **TSXPSY1610M** becomes **TSXPSY1610MC**

Connection accessories

Type	Bus X daisy chaining cable for extendable racks	Line terminators and accessories
	–	Set of 2
Reference	–	TSXTLYEX
	–	TSXTVSY100 (2 Bus X Transient voltage suppressor) ⁽⁵⁾
	L = 1 m	TSXCBY010K
	L = 3 m	TSXCBY030K
	L = 5 m	TSXCBY050K
	L = 12 m	TSXCBY120K
	L = 18 m	TSXCBY180K
	L = 28 m	TSXCBY280KT
	L = 38 m	TSXCBY380KT
	L = 50 m	TSXCBY500KT
	L = 72 m	TSXCBY720KT
	L = 100 m	TSXCBY1000KT

(5) Available 1Q 2010.

Modicon Premium Programmable Automation Controller

Discrete I/O modules



Type of module		Discrete inputs				
Connection		By screw terminals TSXBLY01 (1)		By HE 10 connector (2) high density		
Number of isolated channels		8	16	16 (3)	32	64
Input voltage	24 VDC	TSXDEY08D2 (5)	TSXDEY16D2 (5)	TSXDEY16FK (5)	TSXDEY32D2K (5)	TSXDEY64D2K (5)
	48 VDC	–	TSXDEY16D3 (5)	–	TSXDEY32D3K (5)	–
	24 VAC	–	TSXDEY16A2 (4) (5)	–	–	–
	48 VAC	–	TSXDEY16A3 (5)	–	–	–
	100...120 VAC	–	TSXDEY16A4 (5)	–	–	–
	200...240 VAC	–	TSXDEY16A5 (5)	–	–	–

(1) Terminal block to be ordered separately

(2) For use with Modicon ABE7 wiring system

(3) Module with high-speed isolated inputs (filtering from 0.1 to 7.5 ms) able to activate the event-triggered task

(4) Module also compatible with 24 VDC negative logic



Type of module		Discrete outputs							
		Solid state				Relay			Triac
Connection		By screw terminals TSXBLY01 (1)		By HE10 conn. (2)		By screw terminals TSXBLY01 (1)			
Number of protected channels		8	16	32	64	8	16	8	16
Output voltage/current	24 VDC/0.5 A	TSXDSY08T2 (5)	TSXDSY16T2 (5)	–	–	–	–	–	–
	24 VDC/2 A	TSXDSY08T2 (5)	–	–	–	–	–	–	–
	24 VDC/0.1 A	–	–	TSXDSY32T2K (5)	TSXDSY64T2K (5)	–	–	–	–
	48 VDC/1 A	TSXDSY08T31 (5)	–	–	–	–	–	–	–
	48 VDC/0.25 A	–	TSXDSY16T3 (5)	–	–	–	–	–	–
	24...48 VDC-24...240 VAC/5 A Th.c	–	–	–	–	TSXDSY08R5A (5)	–	–	–
	24...120 VAC/5 A Th.c	–	–	–	–	TSXDSY08R4D (5)	–	–	–
	24...120 VAC/1 A	–	–	–	–	–	–	–	TSXDSY16S4 (5)
	48...240 VAC/1 A	–	–	–	–	–	–	–	TSXDSY16S5
	48...240 VA /2 A	–	–	–	–	–	–	TSXDSY08S5	–
	24 VDC-24...240 VAC/3A	–	–	–	–	TSXDSY08R5 (5)	TSXDSY16R5 (5)	–	–

(1) Terminal block to be ordered separately

(2) For use with Modicon ABE7 wiring system



Type of module		Discrete I/O	
Connection		By HE 10 connector (2) high density	
Number of inputs		16 high-speed	
Number of protected outputs		12 solid state	12 reflex or timed
Output voltage/current	24 VDC/0.5 A	TSXDYM28FK (5)	TSXDYM28FRK (5)

(2) For use with Modicon ABE7 wiring system

(5) For coated version add C at the end of the reference: example TSXDEY08D2 becomes TSXDEY08D2C

Connection accessories: See www.schneider-electric.com

Analog I/O modules



Type of module		Analog input					
		High level with common point			High level isolated	Low level isolated	
Connection		By 25-way SUB-D connector					
Number of channels		4 high-speed	8	16	8	16	By terminal block (1)
Resolution		16 bits	12 bits		16 bits	16 bits	16 bits
Isolation	Between channels	Common point	Common point	Common point	± 200 VDC	± 100 VDC	± 2830 Vrms
	Between channels and earth	~ 1000 Vrms	~ 1000 Vrms	~ 1000 Vrms	~ 1000 Vrms	~ 1000 Vrms	~ 1780 Vrms
Reference	High level input (2)	TSXAEY420 (7)	TSXAEY800 (7)	TSYAEY1600 (7)	TSXAEY810 (7)	–	–
	Multi-range	–	–	–	–	TSXAEY1614 (3)(7)	TSXAEY414 (4)(7)

(1) Screw terminals **TSXBLY01** to be ordered separately

(2) ± 10 V, 0...10 V, 0...5 V, 1...5 V, 0...20 mA, 4...20 mA

(3) ± 63 mV thermocouple (B, E, J, K, L, N, R, S, T, U)

(4) ± 10 V, ± 5 V, 0...10 V, 0...5 V, 1...5 V, 0...20 mA, 4...20 mA, -13...+63 mV, 0...400 W, 0...3850 W, thermal probe, thermocouple



Type of module		Analog output	
		Isolated	With common point
Connection		By screw terminals TSXBLY01 (5)	By 25-way SUB-D connector
Number of channels		4	8
Resolution		11 bits + sign	13 bits + sign
Isolation	Between channels	~ 1500 Vrms	Common point
	Between channels and earth	~ 1500 Vrms	~ 1000 Vrms
Reference	Input signal (6)	TSXASY410 (7)	TSXASY800 (7)

(5) Terminal block to be ordered separately

(6) ± 10 V, 0...10 V, 0...20 mA, 4...20 mA.

(7) For coated version add C at the end of the reference: example **TSXAEY420** becomes **TSXAEY420C**

Modicon Premium Programmable Automation Controller Counter modules



Type of module	Counter		Counter/measurement	Electronic cam
Type of inputs for	Sensors (2) Incremental encoders (3)		Sensors (2) Encoders (3)(4)	Incremental encoders (3) Absolute encoders (5)
Counting	40 kHz		500 kHz/200 kHz (5)	
Cycle time module	5 ms	10 ms	1 ms	–
Number of channels	2	4	2	128 cams
Number of axes	–	–	–	1
Reference	TSXCTY2A (1)	TSXCTY4A (1)	TSXCTY2C (1)	TSXCXY1128 (1)

(1) For coated version add **C** at the end of the reference: example TSXCTY2A becomes TSXCTY2AC

(2) For 2/3-wire PNP/NPN 24 VDC sensors

(3) For 5 VDC RS422, 10...30 VDC Totem Pole incremental encoders

(4) For SSI serial or parallel output absolute encoders

(5) For RS485 serial or parallel output absolute encoders

Motion control modules



Module type	For translators (amplifier for stepper motor)		For analog control servomotors (for asynchronous and brushless motors)				
Control outputs	RS 422		+/- 10 V				
Compatible with drives	Lexium 05, Twin Line		Lexium 05 / 15 LP, MP and HP, Twin Line, Lexium 32				
Functions	Linear axes	–	Limited	Limited or infinite	Limited or infinite(6)		
	Slave axes	–	With static ratio	With dynamic ratio	–		
Frequency for each axis	187 kHz		500 kHz with incremental encoder, 200 kHz with absolute encoder (7)				
Number of axes	1	2	2	4	2	3	
Reference	TSXCFY11 (1)	TSXCFY21 (1)	TSXCAY21 (1)	TSXCAY41 (1)	TSXCAY22 (1)	TSXCAY42 (1)	TSXCAY33 (1)

(6) With linear interpolation on 2 or 3 axes

(7) SSI serial or with parallel outputs



Module type	Servomotors with SERCOS® digital ring (for brushless motors)		
Control outputs	SERCOS® network ring		
Compatible with ranges	Lexium 15 LP, MP, HP and Lexium 32 modular drive		
Functions	Linear or infinite independent axes, slave axes with cam profile or ratio		
Processing	4 sets of axes with linear interpolation from 2 to 8 axes	4 sets of axes with linear and circular interpolation from 2 to 3 axes (8)	4 sets of axes with linear interpolation from 2 to 8 axes
Frequency for each axis	4 MB SERCOS® network ring		
Number of axes	8 (9)	8 (9)	16 (10)
Reference	TSXCSY84	TSXCSY85	TSXCSY164

(8) TSXCSY85 module supplied with TJE trajectory editor: linear trajectories with links between segments according to polynomial or circular interpolation and circular trajectories.

(9) 8 real axes, 4 imaginary axes and 4 remote axes

(10) 16 axes (real axes, imaginary and remote axes)

Weighing modules



Type of module	ISP Plus	
	supplied uncalibrated	supplied calibrated and  offer
Load cell inputs / outputs	50 measurements (for 1 to 8 load cells) / 2 discrete and 1 RS 485 for display unit	
Reference	Without display unit TSXISPY101 (1)	Please consult your Schneider-electric agency
	With display unit TSXXBTN410 TSXISPY121	Please consult your Schneider-electric agency

Connection accessories: See www.schneider-electric.com

Communication modules



Type of module		Ethernet network communication					
Speed		10 Mb/s	10/100 Mb/s				
Standard services		Ethway, Modbus TCP (Uni-TE, Modbus)	Modbus TCP (Uni-TE, Modbus)			EtherNet/IP & Modbus TCP	
Transparent Ready	Class	C10	B30	B30	C30	D10	B30
	Global Data	–	Yes	Yes	Yes	–	–
	I/O Scanning	–	Yes	Yes	Yes	–	Yes
	QoS (3)	–	–	–	–	–	Yes
	TCP Open	Yes	–	–	Yes	–	–
Web server	Standard services	Yes	Yes	Yes	Yes	Yes	Yes
	FactoryCast services	Yes	–	–	Yes	–	–
	FactoryCast HMI services	–	–	–	–	Yes	–
Reference		TSXETY110WS (4)	TSXP57 (1)	TSXETY4103 (4)	TSXETY5103 (4)	TSXWMM100 (4)	TSXETC101 (2)

(1) References: see pages 3/30 and 3/31, Premium processors with integrated Ethernet TCP/IP port

(2) Seamless integration of Modbus and EtherNet/IP environments. Full integration in Unity (FDT/DTM technology). Available Unity V5

(3) QoS: Quality of Service

Profibus DPV1 is available for Modicon Premium

Please refer to page 3/23



Type of module	AS-Interface cabling system	CANopen machine bus	Fipio manager fieldbus	INTERBUS fieldbus	Profibus DP V0 fieldbus
Name and description	In-rack	PCMCIA	Integrated port	In-rack	In-rack
Speed	167 Kb/s	20 K...1 Mb/s	1 Mb/s	0.5 Mb/s	9.6 K...12 Mb/s
Reference	TSXSAY1000 (4)	TSXCPP110 (4)	TSXP57 (2)	TSXIBY100 (4)	TSXPBY100

(2) References: see pages 3/30 and 3/31, Premium processors with integrated Fipio port



Type of module		Serial links					
		Uni-Telway			Modbus		ASCII
Name and description		Integrated port	In-rack	PCMCIA	In-rack	PCMCIA	PCMCIA
Speed		19.2 Kb/s	19.2 Kb/s	1.2...19.2 Kb/s	19.2 Kb/s	1.2...19.2 Kb/s	1.2...19.2 Kb/s
Reference	With interface	RS 485	TSXP57 (1)	TSXSCY21601 (3) (4)	TSXSACP114 (4)	TSXSCY11601 (4)	TSXSACP114 (4)
		RS 232D	–	–	TSXSACP111 (4)	–	TSXSACP111 (4)
		20mA CL	–	–	TSXSACP112 (4)	–	TSXSACP112 (4)

(3) Also designed for Modbus serial (channel 0).



Type of module	Other networks		
	Modbus Plus	Fipway	Fipio (agent function)
Name and description	PCMCIA card	PCMCIA card	PCMCIA card
Speed	1 Mb/s	1 Mb/s	1 Mb/s
Reference	TSXMBP100 (4)	TSXFPP20 (4)	TSXFPP10 (4)

(4) For coated version add C at the end of the reference: example TSXETY110WS becomes TSXETY110WSC

Connection accessories: See www.schneider-electric.com

Modicon Quantum Programmable Automation Controller Processors under Unity Pro software



2

Type of processor		Simple applications	Simple and medium complexity applications
Max. number of discrete I/O (1)	Local	Unlimited (27 slots max.)	
	Remote/distributed	31744 inputs (RIO)/8000 inputs (DIO) and 31744 outputs (RIO)/8000 outputs (DIO)	
Max. number of analog I/O (1)	Local	Unlimited (27 slots max.)	
	Remote/distributed	1984 inputs (RIO)/500 inputs (DIO) and 1984 outputs (RIO)/500 outputs (DIO)	
Type of application-specific I/O		Counter, motion control, high-speed interrupt inputs, time-stamp, serial link, AS-Interface sensor/actuator bus	
Communication ports (2)	Integrated Modbus	2 RS 232/RS 485	2 RS 232
	Modbus Plus	1 integrated, 2 in local rack	1 integrated, 6 in local rack
	Ethernet TCP/IP	2 in local rack	6 in local rack
	Fieldbus	Profibus DP: 2 in local rack	Profibus DP: 6 in local rack
Memory capacity	Internal RAM	548 KB	1056 KB
	With PCMCIA extension	–	–
	Data storage	–	–
Reference		140CPU31110 (4)	140CPU43412U (4)

(1) The maximum values for the number of discrete or analog I/O are not cumulative

(2) The numbers of communication modules are not cumulative, 2 or 6 in local rack, depending on model

(3) Processor compatible with Unity Pro software after updating its firmware (via OS-Loader included in Unity Pro)

(4) For coated version add C at the end of the reference: example **T140CPU31110** becomes **140CPU31110C**

(5) Suitable for safety related application up to SIL2 and SIL3



Complex applications			Hot Standby redundant applications		Long distance HSBY CPU
Unlimited (26 slots max.)			Unlimited (13 slots max.)	Unlimited (26 slots max.)	Unlimited (13 slots max.)
31744 inputs (RIO)/8000 inputs (DIO) and 31744 outputs (RIO)/8000 outputs (DIO)			31744 inputs and 31744 outputs	31744 inputs (RIO)/8000 inputs (DIO) and 31744 outputs (RIO)/8000 outputs (DIO)	31744 inputs and 31744 outputs
Unlimited (27 slots max.)			Unlimited (13 slots max.)	Unlimited (27 slots max.)	Unlimited (13 slots max.)
1984 inputs (RIO)/500 inputs (DIO) and 1984 outputs (RIO)/500 outputs (DIO)			1984 inputs and 1984 outputs	1984 inputs (RIO)/500 inputs (DIO) and 1984 outputs (RIO)/500 outputs (DIO)	1984 inputs and 1984 outputs
Intrinsically safe I/O, counter, motion control, high-speed interrupt inputs, time-stamp, serial link, AS-Interface sensor/actuator bus			–	–	–
1 RS 232/485			1 RS 232/485	1 RS 232/485	1 RS 232/485
1 integrated, 6 in local rack			1 integrated	1 integrated, 6 in local rack	1 integrated
1 integrated, 6 in local rack			1 integrated, 6 in local rack	6 in local rack	1 integrated, 6 in local rack
Profibus DP: 6 in local rack			–	Profibus DP: 6 in local rack	–
768 KB	1024 KB	3072 KB	1024 KB	1024 KB	1024 MB
7 MB	7 MB	7 MB	7 MB	7 MB	7 MB
8 MB	8 MB	8 MB	–	8 MB	–
140CPU65150 (4)	140CPU65160 (4)	140CPU65260 (4)	140CPU65160S (5)	140CPU67160 (4)	140CPU67160S (5)
					140CPU67261

Modicon Quantum Programmable Automation Controller

Power supply modules ⁽¹⁾



Type of power supply module for

Quantum

Input voltage	24 VDC	48...60 VDC	100...150 VDC	120...130 VAC	115/230 VAC
Output current	8 A/3 A (5)	8 A	8 A/3 A	8 A/3 A	11 A
Reference	Standalone (2)	140CPS21100 (6)	–	140CPS51100 (6)	140CPS11100 (6)
	Summable	140CPS21400 (6)	140CPS41400 (6)	–	–
	Redundant	140CPS22400 (6)	140CPS42400 (6)	140CPS52400 (6)	–
					140CPS12420 (6)

(1) Process power supplies see chapter 6 "Power supply"

(2) The output current for the standalone power supply modules is 3 A

PCMCIA memory extensions



Type of PCMCIA card for Unity processors 140CPU65/67	Application	Additional data
Technology	SRAM	Flash EPROM
Memory size	512 Kb/512 Kb (4)	TSXMCPC512K (3)
	1 MB (5)	TSXMRPC001M (6)
	2 MB (5)	TSXMRPC002M
	2 MB/1 MB (4)	–
	3 MB (5)	TSXMRPC003M (6)
	4 MB	–
	7 MB (5)	TSXMRPC007M (6)
	8 MB	–
		TSXMFPP004M
		–
		TSXMRPF004M
		–
		TSXMRPF008M

(3) These cards have an additional SRAM area for storing data (recipes, production data).

(4) The 1st value corresponds to the size of the application area, the second to the size of the additional data area for storing data (recipes, production data, etc)

(5) By configuration the user can reserve part of the memory space for data storage (recipes, production data, etc)

(6) For coated version add C at the end of the reference: example **TSXMRPC001M** becomes **TSXMRPC001MC**

Racks



Type		Racks	
	Dimensions WxDxH		
References	2 slots	104x104x290 mm	140XBP00200 (2)
	3 slots	143x104x290 mm	140XBP00300 (2)
	4 slots	184x104x290 mm	140XBP00400 (2)
	6 slots	265x104x290 mm	140XBP00600 (2)
	10 slots	428x104x290 mm	140XBP01000 (2)
	16 slots	671x104x290 mm	140XBP01600 (2)
	Rack extension module		140XBE10000 (1) (2)

(1) Local extension module, to be placed in main rack and secondary rack.

(2) For coated version add C at the end of the reference: example **140XBP00200** becomes **140XBP00200C**

Connection accessories ⁽³⁾

Type		Cable for extension racks (main and secondary)
References	L = 1 m	140XCA71703
	L = 2 m	140XCA71706
	L = 3 m	140XCA71709

(3) **Other accessories:** See www.schneider-electric.com

Modicon Quantum Programmable Automation Controller

Discrete I/O modules



2

Type of module (5)		Discrete inputs					
Connection		By screw terminals 140XTS00200 (to be ordered separately)					
Number of isolated channels		16	4 groups of 8	3 groups of 8	2 groups of 8	6 groups of 16	8 groups of 2
Input voltage	5 VDC TTL (negative logic)	–	140DDI15310	–	–	–	–
	24 VDC	–	140DDI35300(1)(2)	–	–	140DDI36400	–
	10...60 VDC	–	140DDI85300	–	–	–	140DDI84100
	20...30 VDC	–	140DSI35300(1)	–	–	–	–
	125 VDC	–	–	140DDI67300	–	–	–
	24 VAC	140DAI34000	140DAI35300	–	–	–	–
	48 VAC	140DAI44000	140DAI45300	–	–	–	–
	115 VAC	140DAI54000	140DAI55300	–	140DAI54300	–	–
230 VAC	140DAI74000	140DAI75300	–	–	–	–	

(1) For negative logic, replace 00 at the end of the reference with 10, for example **140DDI35300** becomes **140DDI35310**.

(2) Non-interfering module in safety related application



Type of module (5)		Discrete outputs					
		Solid state					
Connection		By screw terminals 140XTS00200 (to be ordered separately)					
Number of protected channels		16	4 groups of 8	4 groups of 4	2 groups of 8	6 groups of 16	2 groups of 6
Output voltage/current	5 VDC TTL/0.075 A (3)	–	140DDO15310	–	–	–	–
	24 VDC/0.5 A	–	140DDO35301(1) 140DDO35300(2)	–	–	–	–
	10...30 VDC/0.5 A (4)	–	140DVO85300	–	–	–	–
	19.2...30 VDC/0.5 A	–	–	–	–	140DDO36400	–
	10...60 VDC/2 A	–	–	–	140DDO84300	–	–
	24...125 VDC/0.75 A	–	–	–	–	–	140DDO88500
	24...48 VAC/4 A	–	–	140DAO84220	–	–	–
	24...115 VAC/4 A	140DAO84010	–	–	–	–	–
	24...230 VAC/ 4-3 A	140DAO84000	140DAO85300	–	–	–	–
	100...230 VAC/4-3 A	–	–	140DAO84210	–	–	–

(1) For negative logic, replace 01 at the end of the reference with 10, for example **140DDO35301** becomes **140DDO35310**.

(2) Non-interfering module in safety related application

(3) Negative logic

(4) Controlled outputs



Type of module (5)		Discrete I/O			Discrete outputs	
		Solid state			Relay	
Connection		By screw terminals 140XTS00200 (to be ordered separately)			–	
Number of I/O		2 groups of 8/2 groups of 4		1 group of 4/ 4 isolated	–/16 NO	–/8 NO/NC
Input voltage		24 VDC	115 VAC	125 VDC	–	–
Output voltage/current		24 VDC / 4 A	115 VAC / 8 A	24...125 VDC / 16 A	2 A	5 A
Reference		140DDM39000	140DAM59000	140DDM69000	140DRA84000	140DRC83000

(5) For coated version add C at the end of the reference: example **140DDI15310** becomes **140DDI15310 C**

Connection accessories: See www.schneider-electric.com

Analog I/O modules



Type of module (4)	Analog inputs				
Connection	By screw terminals 140XTS00200 (to be ordered separately)				
Number of channels	8	16	8		
Input signal	4...20 mA 1...5 V	0...25/20 mA 4...20 mA	(1)	Thermal probe Pt, Ni	Thermocouple (2)
Resolution	12 bits	0...25000 points	16 bits	12 bits + sign	16 bits
Reference	140ACI03000	140ACI04000 (3)	140AVI03000	140ARI03010	140ATI03000

(1) 0...25 mA, ± 20 mA, 4...20 mA, 0...10 V, ± 10 V, 0...5 V, ± 5 V, 1...5 V.

(2) Type B, E, J, K, R, S, T, mV

(3) Non-interfering module in safety related application



Type of module (4)	Analog output		
Connection	By screw terminals 140XTS00200 (to be ordered separately)		
Number of channels	4	8	4
Input signal	4...20 mA	0...25/20 mA 4...20 mA	0...10 V, ± 10 V 0...5 V, ± 5 V
Resolution	12 bits	0...25000 points	12 bits
Reference	140ACO02000 (3)	140ACO13000	140AVO02000

(3) Non-interfering module in safety related application



Type of module (4)	Analog I/O
Connection	By screw terminals 140XTS00200 (to be ordered separately)
Number of inputs	4
Number of outputs	2
Input signal	0...20 mA, ± 20 mA, 4...20 mA, 0...10 V, ± 10 V, 0...5 V, ± 5 V, 1...5 V.
Resolution	Inputs 16 bits, outputs 12 bits
Reference	140AMM09000

(4) For coated version add C at the end of the reference: example 140ACI03000 becomes 140ACI03000C

Connection accessories: See www.schneider-electric.com

Modicon Quantum Programmable Automation Controller

Counter and special purpose modules



Type of module	High-speed counter		High-speed inputs with interrupt	Time-stamp system
Type of inputs for	Incremental encoders		Discrete 24 VDC (2)	Discrete 24...125 VDC
Counting frequency	100 kHz	500 kHz	–	–
Number of channels	5	2	16	32
Reference	140EHC10500	140EHC20200	140HLI34000	140ERT85410 (4)

(2) 3 operating modes: Interrupt, latch, high-speed inputs, on rising or falling edge.

Safety I/O modules



Type of modules	Analog	Discrete	
Connection	Screw terminal		
Number of inputs	8 analog inputs	16 discrete inputs	–
Number of outputs	–	–	16 discrete outputs
Input signal	4...20mA	24VDC	–
Output voltage	–	–	24VDC
Resolution	16 bits	–	–
Certification	Suitable for safety related application up to SIL2 and SIL3, UL, CE, CSA, Haz-loc		
Reference	140SAI94000S	140SDI95300S	140SDO95300S

Communication modules



Type of module		Ethernet TCP/IP network				
Speed		10/100 Mb/s				
Protocol		Modbus TCP	Modbus TCP	Modbus TCP	Modbus TCP	EtherNet/IP & Modbus TCP
Transparent Ready	Class	B30	B30	C30	D10	B30
	Global Data	Yes	Yes	Yes	–	–
	I/O Scanning	Yes	Yes	Yes	–	Yes
	FDR server	Yes	Yes	Yes	–	Yes
	SNMP protocol	Yes	Yes	Yes	Yes	Yes
Web server	QoS (1)	–	–	–	–	Yes
	Standard services	Yes	Yes	Yes	Yes	–
	FactoryCast services	–	–	Yes	Yes	–
FactoryCast HMI services		–	–	–	Yes	–
Reference		140CPU651* (2)	140NOE77101	140NOE77111	140NWM10000	140NOC77101

(1) QoS: Quality of Service

(2) 140 CPU 651 50, 140 CPU 651 60, 140 CPU 652 60, 140 CPU 671 60

PROFIBUS DPV1 is available for Modicon Quantum

Please refer to page 3/23



Type of module	Modbus Plus network	AS-Interface cabling system	Fieldbus INTERBUS	Profibus DP Master V1 (1)	Modnet fielbus
Name and description	Integrated link	In-rack	In-rack	In-rack	In-rack
Speed	1 Mb/s	167 Kb/s	0,5 Mb/s	to 12 Mb/s	375 Kb/s
Reference	140CPU*	140EIA92100	140NOA62200	PTQPDPMV1	140NOG11100

(1) from your partner Prosoft, www.prosoft-technology.com

* 140 CPU 311 10, 140 CPU 434 12U, 140 CPU 651 50, 140 CPU 651 60, 140 CPU 652 60, 140 CPU 671 60



Type of module	Serial link Modbus	ASCII
Name and description	Integrated link	In-rack
Speed	19.2 Kb/s	19.2 Kb/s
Reference	140CPU* (1)	140ESI06210

(1) RS 232/RS 485 on 140CPU651●● and 140CPU67160 processors and RS 232 on 140CPU31110, 140CPU43412A, 140CPU53414A processors.

* 140 CPU 311 10, 140 CPU 434 12U, 140 CPU 651 50, 140 CPU 651 60, 140 CPU 652 60, 140 CPU 671 60

To operate in a corrosive environment, Quantum modules can be ordered with a conformal coating applied to components of the product. Conformal coating will extend its life and enhance its environmental performance capabilities. To order conformal coating append a C to the standard catalog number. For example, 140CPS 11420 > 140CPS 114 20C

Automation systems Unity Pro, configuration software For Modicon M340, Premium, and Quantum



2

Software type		Unity Pro Small version 6.0			
License type version 6.0		Single (1 workstation)	Group (3 workstations)	Team (10 workstations)	Facility (100 workstations)
References	Software pack	UNYSPUSFUCD60	UNYSPUSFGCD60	UNYSPUSFTCD60	–
	Upgrade Legacy Software (1)	UNYSPUSZUCD60	UNYSPUSZGCD60	UNYSPUSZTCD60	–
Software type		Unity Pro Medium version 6.0			
License type version 6.0		Single (1 workstation)	Group (3 workstations)	Team (10 workstations)	Facility (100 workstations)
References	Software pack	UNYSPUMFUCD60	UNYSPUMFGCD60	UNYSPUMFTCD60	–
	Upgrade Legacy Software (2)	UNYSPUMZUCD60	UNYSPUMZGCD60	UNYSPUMZTCD60	–
Software type		Unity Pro Large version 6.0			
License type version 6.0		Single (1 workstation)	Group (3 workstations)	Team (10 workstations)	Facility (100 workstations)
References	Software pack	UNYSPULFUCD60	UNYSPULFGCD60	UNYSPULFTCD60	UNYSPULFFCD60
	Upgrade Legacy Software (3)	UNYSPULZUCD60	UNYSPULZGCD60	UNYSPULZTCD60	UNYSPULZFC60
Software type		Unity Pro Extra Large version 6.0			
License type version 6.0		Single (1 workstation)	Group (3 workstations)	Team (10 workstations)	Facility (100 workstations)
References	Software pack	UNYSPUEFUCD60	UNYSPUEFGCD60	UNYSPUEFTCD60	UNYSPUEFFCD60
	Upgrade Legacy Software (4)	UNYSPUEZUCD60	UNYSPUEZGCD60	UNYSPUEZTCD60	UNYSPUEZFC60

(1) From Concept S, PL7 Micro, ProWORX NxT Lite and ProWORX 32 Lite

(2) From Concept S/M, PL7 M/J, ProWORX NxT Lite and ProWORX 32 Lite

(3) From Concept S /M, PL7 M/J/P, ProWORX NxT Lite and ProWORX 32 Lite

(4) From all models Concept, PL7, ProWORX NxT and ProWORX 32

Unity Pro, is common programming software for debugging and operation of Modicon M340, Premium, and Quantum programmable controller ranges. Unity Pro takes the recognized usage values of PL7 and Concept software and offers a complete set of new functions for improved productivity and opening to other software.

Five IEC61131-3 languages are supported as standard in Unity Pro with all debugging functions, either on the simulator or directly online with the programmable controller.

Additional LL984 language is now available in Unity V 6.0 (Unity V6.0 available 2Q 2011) to allow easy migration of Modsoft an Concept applications to Quantum platforms.

Thanks to symbolic variables independent of memory, structured data and user function blocks, application objects are a direct reflection of the automated process application components. Unity Pro operator screens are user-configured in the application from graphic libraries. Operator accesses are simple and direct. The converters integrated in Unity Pro automatically convert PL7 and Concept IEC 61131-3 standards and applications.

Unity V 6.0 fully support new Quantum Ethernet RIO architectures.

It integrates additional possibilities for Online changes in RUN mode, as well as improved Search/Replace Toll.

Debugging and Maintenance, as well as Design are greatly simplified and improved.

Unity software

Specialized software

2

Unity Pro application comparison software

Software type		Unity Dif
Licence type version 2.21		Single (1 workstation), French and English languages (software and documentation)
Reference	Software extension (1)	UNYSDUZFUCD22
Licence type version 2.21		Site licence (100 workstations), French and English languages (software and documentation)
Reference	Software extension (1)	UNYSDUZFFCD22

(1) Requires version Unity V2.1 or later

EF/EFB function development software in C language

Software type		Unity EFB Toolkit
Licence type version 3.1		Single (1 workstation), English language (software and documentation)
References	Software pack	UNYSPUZFUCD31E
	Renewal	UNYCSPSPUZBU

Process application design and generation software


Software type		Unity UAG (Unity Application Generator)	
Licence type version 3.2		Single (1 workstation)	Site (> 10 workstations)
References	Software pack	UAGSEWLFUCD32	UAGSEWLFCD23

Specific libraries according to the software used

Library type	Control Libraries				
Designation	Predictive Control Library (for Unity Pro and Concept)	Fuzzy Control Library (for Unity Pro)	TeSys Library (for Unity Pro)	HVAC Library (for Unity Pro)	Flow Calculation Library (for Unity Pro)
Licence type	Single Licence (1 work station)				
Reference	UNYLPZCAUCD10	UNYLFZZAUWB12	UNYLTSAUWB10	UNYLHVZAUWB10	UNYLAGZAUWB20

Library type	UAG Libraries	
Designation	Device and Process Library (for UAG)	Process Application Library (for UAG)
Licence type	Single Licence (1 workstation)	
Reference	UAGSBTFUWB13	UAGSBTFUWB20

*Includes Process Application Library (PAL) V2.0 and Device and Process Library (DPL) V1.0



PL7 is the common programming, debugging and operating software for the TSX Micro and Premium ranges of PLCs as well as Atrium coprocessors (see pages 3/12, 3/18 and 3/26).

PL7 offers 4 IEC languages: Instruction List (IL), Ladder Diagram (LD), Structured Text (ST) and Sequential Function Chart (SFC). You can use the most suitable language for each function in your application, making use of the multi-tasking structure of the processors.

For using application-specific functions, PL7 directly integrates the application-specific screens required for configuration and adjustment as well as supervisory and diagnostics activities.

Type of software		PL7 Micro for TSX Micro platform			
Type of license version 4.5	Reference	Single (1 station)	Single with SyCon V2.8	Group (3 stations)	Open Team (10 stations)
	Software package	TLXCDPL7MP45	TLXCDPL7MPC45	TLXCD3PL7MP45	TLXOTPL7MP45M
Update (1)	Reference	TLXRCDPL7MP45M	TLXRCDPL7MPC45M	TLXRCD3PL7MP45M	–
	Software package	TLXRCDPL7MP45M	TLXRCDPL7MPC45M	TLXRCD3PL7MP45M	–
Type of license version 4.5		PL7 Junior for TSX Micro/Premium and Atrium coprocessor platforms			
Type of license version 4.5	Reference	Single (1 station)	Group (3 stations)		
	Software package	TLXCDPL7JP45	TLXCD3PL7JP45		
Update (1)	Reference	TLXRCDPL7JP45M	TLXRC3DPL7JP45M		
	Software package	TLXRCDPL7JP45M	TLXRC3DPL7JP45M		
Upgrade (2)	Reference	TLXUCDPL7JP45M	TLXUCD3PL7JP45M		
	Software package	TLXUCDPL7JP45M	TLXUCD3PL7JP45M		
Type of license version 4.5		PL7 Pro for TSX Micro/Premium and Atrium coprocessor platforms			
Type of license version 4.5	Reference	Single (1 station)	Group (3 stations)	Open Team (10 stations)	Open Site
	Software package	TLXCDPL7PP45	TLXCD3PL7PP45	TLXOTPL7PP45M	TLXOSPL7PP45M
Update (1)	Reference	TLXRCDPL7PP45M	TLXRCD3PL7PP45M	–	–
	Software package	TLXRCDPL7PP45M	TLXRCD3PL7PP45M	–	–
Upgrade (2)	Reference	TLXUCDPL7PP45M	TLXUCD3PL7PP45M	–	–
	Software package	TLXUCDPL7PP45M	TLXUCD3PL7PP45M	–	–

(1) From the previous software version.

(2) From lower level, earlier version software.

Specialist tools

EF function development software in C language

Type of software		PL7 SDKC for EF function development software in C language
PL7 SDKC software extension		For PL7 Micro/Junior/Pro
Reference		TLXLSDKCPL741M

Development of applications in C language

Type of software		PL7 FUZ for processing process applications using fuzzy logic
PL7 FUZ software extension		For PL7 Micro/Junior/Pro, TSX Micro/Premium
Reference		TLXLPL7FUZ34M

Comparison of PL7 applications

Type of software		PL7 DIF for comparison of applications	
PL7 DIF software extension		For PL7 Pro, TSX Micro/Premium	
Type of license	Reference	Single (1 station)	Site (> 10 stations)
Reference	Reference	TLXCDPL7DIF42	TLXOSPL7DIF42

Availability of control systems based on Premium platforms

Type of software		Warm Standby redundant
Warm Standby software extension		For PL7 Junior/Pro
Type of license	Reference	Single (1 station)
Reference	Reference	TLXCDWSBYP40F / E

Programming software

For Modicon Quantum, Momentum



Concept is the IEC programming software for the Momentum and Quantum range of PLCs. It provides advanced Microsoft Windows based tools that deliver a multi-language development environment for control system programming.

Uses familiar, standardized editors, bundled in a single application to create and integrate PLC control, communication and diagnostic logic.

Five IEC editors give users the freedom to choose the programming language that fits their application requirements: Function Block Diagram (FBD), Ladder Diagram (LD), Sequential Function Chart (SFC), Structured Text (ST) and Instruction List (IL).

Type of software		Concept for Quantum/Momentum platforms			
Type of license version 2.6		Single (1 station)	Group (3 stations)	10 users (10 stations)	Site
Software references	Concept S	372SPU47101V26	–	–	–
	Concept M	372SPU47201V26	–	–	–
	Concept XL	372SPU47401V26	372SPU47411V26	372SPU47421V26	372SPU47431V26
Update references	Concept S (3)	372ESS47101	–	–	–
	Concept M (3)	372ESS47201	–	–	–
	Concept XL (3)	372ESS47401	372ESS47403	372ESS47410	372ESS47400

(3) From an earlier software version.

2

Specialist tools

EF/EFB function development software in C language

Type of software		Concept EFB Toolkit	
Type of license		Version 2.6	Upgrade version 2.6
Reference	Software package	332SPU47001V26	372ESS47001

Concept service version limited to application loading

Type of software		Concept Application Loader	
Type of license		Version 2.6	
Reference	Software package	372SPU47701V26	

Software for designing and generating batch/process applications

Type of software		Unity UAG (Unity Application Generator)	
Type of license version 3.0		Single (1 station)	Site
Reference	Medium Software package	UAGSEWMFUCD31	UAGSEWMFFCD31
	Large Software package	UAGSEWLFUCD31	UAGSEWLFCD31



ProWORX for Modicon Quantum, Momentum

ProWORX 32 is the flexible, easy-to-use cross-platform LL984-programming software for Modicon range PLCs. It gives you the power to program your Modicon controllers online or offline, manage your I/O subsystems, and analyze your plant's activity in real-time, all in a familiar Windows environment.

ProWORX 32 provides client/server capabilities to organize user-groups and -rights, store projects at a central location and realize office-plant floor bridging.

The project emulator provides the ability to test projects prior to running them in the PLC run-time environment to ensure your system will run at peak efficiency.

Type of software		ProWORX for Quantum/Momentum platforms			
Type of license version 2.1		Single (1 station)	Group (3 stations)	Multi-user (10 stations)	Site
Software references	ProWORX 32 Server	372SPU78001PSEV	–	–	–
	ProWORX 32 Suite	372SPU78001PSSV	–	–	–
	ProWORX 32 Client, Full Dev.	372SPU78001PDEV	372SPU78001PSTH	372SPU78001PSTE	372SPU78001SITE
	ProWORX 32 Online	372SPU78101PONL	–	–	–
	ProWORX 32 Lite	372SPU71001PLDV	372SPU71001PLTH	372SPU71001PLTE	–
Upgrade to ProWORX 32 references (4)		372SPU78401LPUP	372SPU78401LPSTH	372SPU78401LPSTE	–

(4) Only possible for customers, who are "up-to-date" with CSP (continuing support program)




Vijeo Citect

Type	Supervisory control and data acquisition (SCADA) software
Compatibility	All Schneider Electric automation platforms and third party devices
Operating system	Windows XP® SP3 (32 bit), Windows® 2003 Server SP2 (32 bit), Windows Vista® SP2 (32 and 64 bit), Windows® Server 2008 SP2 (32 and 64 bit), Windows® 7 (32 and 64 bit), Windows® Server 2008 R2
Versions	The development licence (without network connectivity) allows free communication with PLCs for 10 minutes at a time. Vijeo Citect full server licences are available in 75 points, 150 points, 500 points, 1500 points, 5000 points, 15000 points and unlimited points Vijeo Citect Lite (without network connectivity) is available in 100 - 1200 points
References	Please contact your local sales representative



Vijeo Suite; The best HMI/SCADA offer. Designed to offer optimum integration with Schneider Electric equipment.

Vijeo Citect is a software for operating and monitoring. With its powerful visualisation capabilities and operational features, it delivers actionable insight faster, enabling operators to respond quickly to process disturbances, thereby increasing their effectiveness. Its easy-to-use configuration tools and powerful features enable you to quickly develop and deploy solutions for any size application.

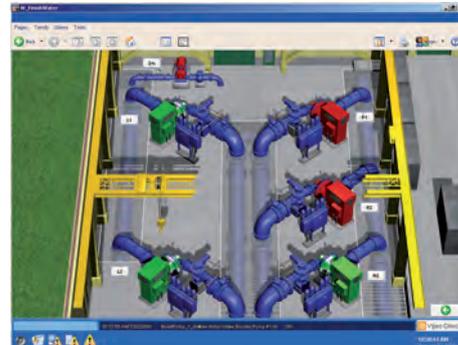

Benefits at a glance:

- **Full-redundancy for reliable architecture:** Vijeo Citect's in-built redundancy greatly reduces lost data and downtime, tolerating failure anywhere in your system.
- **Powerful graphics:** Vijeo Citect lets you develop true colour, easy-to-use graphics that provide the operator with an intuitive, consistent user interface.
- **Intuitive Process Analysis tool:** Vijeo Citect Process Analyst is an intuitive process analysis tool that sits directly in the SCADA system, providing a complete story of your plant and delivering actionable insight to the operators faster, thereby improving their efficiency and productivity.
- **Object-based configuration for rapid development:** Developing your control system is made quick and easy by Vijeo Citect's object-based configuration tools such as page templates, Genies, Super Genies, and SpeedLink.
- **Engineering with ease:** Vijeo Citect offers flexible and targeted system engineering tools to help you be more efficient. It accelerates your control system configuration process, significantly reducing your engineering time and costs and minimising your project risk.


Vijeo Historian Reporting software




Vijeo Historian

Type	Historian software
Compatibility	All Schneider Electric automation platforms and third party devices
Operating system	Windows XP® SP3 (32 bit), Windows® 2003 Server SP2 (32 bit), Windows Vista® SP2 (32 and 64 bit), Windows® Server 2008 SP2 (32 and 64 bit), Windows® 7 (32 and 64 bit), Windows® Server 2008 R2
References CD-ROM PC	Please contact your local sales representative

2

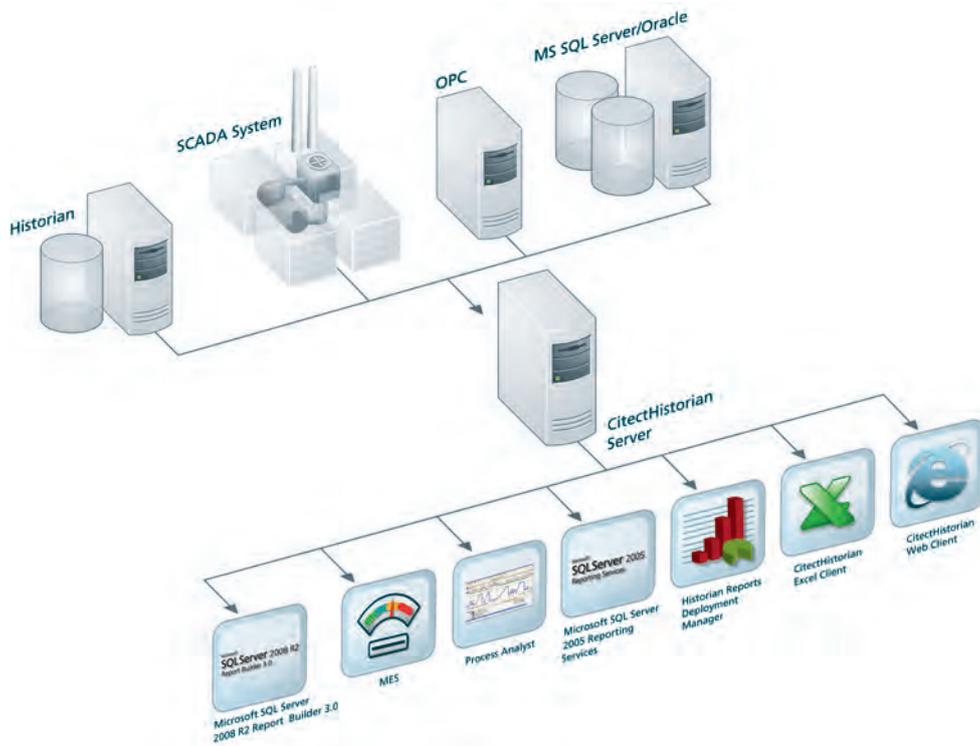

Vijeo Historian is a software for the information management. It comprises the historian and portal functionalities of the solution, enabling you to accurately store data for long-term reporting while connecting your production and business systems through its active data transfers and simple, easy-to-use reporting.

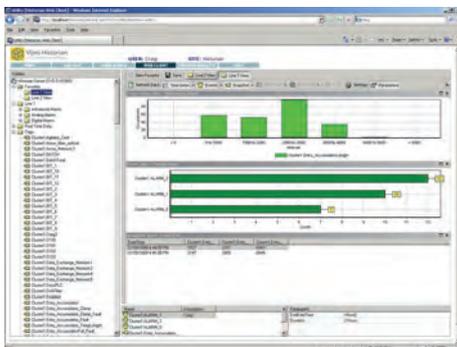

Benefits at a glance:

- **Business systems integration:** Vijeo Historian reduces the complexity and cost of bridging the divide between senior management and plant operations through its simple, easy-to-use interface and its active data transfers that push data from the control systems up to the business systems.
- **An open data store:** Vijeo Historian utilises 100% Microsoft SQL Server 2008 R2 as its embedded historical data store. Its open, industry-standard technology and trusted security integrate effortlessly into your business in a way that lowers your total cost of ownership.
- **Enterprise-wide reporting:** A range of reports can be produced using a convenient built-in historian in the familiar, open Microsoft user interface. Vijeo Historian also comes with a standard set of pre-configured reports, simplifying basic alarm and tag reporting.
- **Alarm management:** Pre-configured alarm reports based on the EEMUA (Engineering Equipment & Materials Users Association) 191 alarm management guidelines.
- **Going 'green' with the energy reports:** Energy reports help you perform a comprehensive energy assessment of your plant to determine how much energy is being consumed and how much could potentially be saved.